


03033

montažna ploča za horizontalni prekidač vigi
NSX/CVS 250, fiksna izvedba

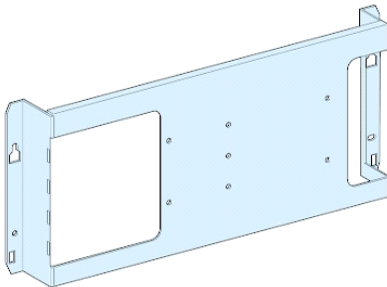

Glavno

Range	Prisma
Range compatibility	Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Easycompact: fixed CVS100...160 with earth leakage protection - control: toggle - horizontal installation Easycompact: fixed CVS250 with earth leakage protection - control: toggle - horizontal installation Compact: fixed NSX100...160 with earth leakage protection - control: toggle - horizontal installation Compact: fixed NSX250 with earth leakage protection - control: toggle - horizontal installation Compact: fixed NSX100...250 and ammeter without earth leakage protection - control: toggle - horizontal installation
Poles description	1 x 3P: fixed: NSX100...160 horizontal installation 1 x 4P: fixed: NSX100...160 horizontal installation 1 x 3P: fixed: NSX250 horizontal installation 1 x 4P: fixed: NSX250 horizontal installation 1 x 4P: fixed: CVS100...160 horizontal installation 1 x 3P: fixed: CVS100...160 horizontal installation 1 x 4P: fixed: CVS250 horizontal installation 1 x 3P: fixed: CVS250 horizontal installation 1 x 3P: fixed: NSX100...250 and ammeter horizontal installation 1 x 4P: fixed: NSX100...250 and ammeter horizontal installation

Komplementarno

Enclosure/cubicle description	Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Number of vertical modules [50 mm]	4 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide floor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide wall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide floor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide wall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide floor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide wall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 850 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide floor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide wall-mounted enclosure + duct (cable coming from top or bottom of enclosure)

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešku ili potrebu ovdje sadržanih informacija.

4 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 850 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)

4 module(s) : NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide floor-standing enclosure + duct (cable coming from top or bottom of enclosure)

4 module(s) : NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Wide wall-mounted enclosure + duct (cable coming from top or bottom of enclosure)

4 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 850 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)

4 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 850 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)

Condition of use	Need additional plate (2M high) when installation of device is in horizontal
Height	150 mm
Width	600 mm
Product weight	0.94 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

Okolina

standards	IEC 61439-2
product certifications	ASEFA

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0807 - Schneider Electric declaration of conformity	Compliant - since 0807 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------