


03041

montažna ploča za vertikalnu zakretnu ručicu  
NSX/CVS/vigi 250, fiksna izvedba

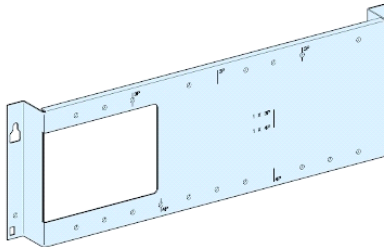

### Glavno

Range	Prisma
Range compatibility	Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Compact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation Easypact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - vertical installation Easypact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - vertical installation Compact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - vertical installation Easypact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - vertical installation Easypact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - vertical installation
Poles description	4 x 3P: fixed: NSX100...160 vertical installation 4 x 3P: fixed: NSX250 vertical installation 4 x 3P: fixed: CVS100...160 vertical installation 4 x 3P: fixed: CVS250 vertical installation 3 x 4P: fixed: NSX100...160 vertical installation 3 x 4P: fixed: NSX250 vertical installation 3 x 4P: fixed: CVS100...160 vertical installation 3 x 4P: fixed: CVS250 vertical installation

### Komplementarno

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Number of vertical modules [50 mm]	9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure) 11 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 11 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure) 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure) 11 module(s) : NSX250 without earth leakage protection , direct with long terminal

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)  
 11 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)  
 10 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)  
 10 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)  
 13 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)  
 13 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)  
 10 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)  
 10 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)  
 13 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure)  
 13 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)

Condition of use	Need additional plate (1M high) when installation of device is in vertical
Height	150 mm
Product weight	0.84 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

## Okolina

standards	IEC 61439-2
product certifications	ASEFA

## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0807 - Schneider Electric declaration of conformity	Compliant - since 0807 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

## Contractual warranty

Warranty period	18 months
-----------------	-----------