


03043

montažna ploča za zakretnu ručicu preklopke
NSX/INS-INV250

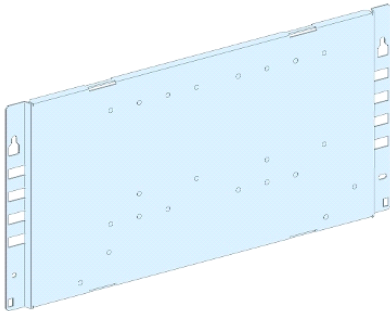

Glavno

Range	Prisma
Range compatibility	Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Compact: fixed INS250 source changeover - control: mechanical interlock - vertical installation Compact: fixed INV250 source changeover - control: mechanical interlock - vertical installation Compact: fixed INS250 source changeover - control: direct front rotary handle - vertical installation Source changeover: fixed NSX100...250 source changeover - control: mechanical interlock - vertical installation
Poles description	1 x 3P: fixed: NSX100...250 source changeover vertical installation 1 x 3P: fixed: INS250 source changeover vertical installation 1 x 3P: fixed: INV250 source changeover vertical installation 1 x 4P: fixed: NSX100...250 source changeover vertical installation 1 x 4P: fixed: INS250 source changeover vertical installation 1 x 4P: fixed: INV250 source changeover vertical installation

Komplementarno

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Number of vertical modules [50 mm]	10 module(s) : INS250 source changeover, front connection in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s) : INS250 source changeover, front connection in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure) 10 module(s) : INV250 source changeover, front connection in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s) : INV250 source changeover, front connection in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure) 11 module(s) : NSX100...250 source changeover, front connection in 600 mm Wide floor-standing enclosure (cable coming from top or bottom of enclosure) 11 module(s) : NSX100...250 source changeover, front connection in 600 mm Wide wall-mounted enclosure (cable coming from top or bottom of enclosure)
Condition of use	Need additional plate (1M high) when installation of device is in vertical
Height	200 mm
Product weight	1.37 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

Okolina

standards	IEC 61439-2
product certifications	ASEFA

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretnu korisničku primjenu. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešku upotrebu ovdje sadržanih informacija.

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0807 - Schneider Electric declaration of conformity	Compliant - since 0807 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------