


03050

montažna ploča za vertikalni prekidač
NSX/CVS/vigi/INS 250, fiksna izvedba

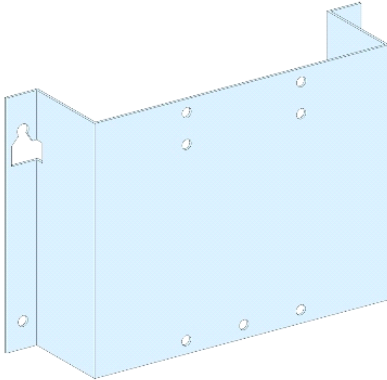

Glavno

Range	Prisma
Range compatibility	Prisma P Prisma G Prisma Pack 250
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Compact: fixed INS250 - control: direct front rotary handle - vertical installation Compact: fixed INV250 - control: direct front rotary handle - vertical installation Compact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation Compact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation Compact: plug-in NSX100...160 with earth leakage protection - control: toggle - vertical installation Compact: plug-in NSX250 with earth leakage protection - control: toggle - vertical installation Compact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation Compact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation Compact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation Compact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation Easypact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation Easypact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation Compact: fixed INV100 - control: direct front rotary handle - vertical installation Compact: fixed INV160 - control: direct front rotary handle - vertical installation Compact: fixed INV200 - control: direct front rotary handle - vertical installation Easypact: fixed CVS100...160 with earth leakage protection - control: toggle - vertical installation Easypact: fixed CVS250 with earth leakage protection - control: toggle - vertical installation
Poles description	1 x 3P: fixed: INS250 vertical installation 1 x 3P: fixed: INV250 vertical installation 1 x 4P: fixed: INS250 vertical installation 1 x 4P: fixed: INV250 vertical installation 1 x 3P: fixed: INV100 vertical installation 1 x 3P: fixed: INV160 vertical installation 1 x 3P: fixed: INV200 vertical installation 1 x 4P: fixed: INV100 vertical installation 1 x 4P: fixed: INV160 vertical installation 1 x 4P: fixed: INV200 vertical installation 1 x 3P: fixed: NSX100...160 vertical installation 1 x 3P: fixed: NSX250 vertical installation 1 x 3P: fixed: CVS100...160 vertical installation 1 x 3P: fixed: CVS250 vertical installation 1 x 4P: fixed: NSX100...160 vertical installation 1 x 4P: fixed: NSX250 vertical installation 1 x 4P: fixed: CVS100...160 vertical installation 1 x 4P: fixed: CVS250 vertical installation 1 x 3P: plug-in: NSX100...160 vertical installation

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Komplementarno

Enclosure/cubicle description	<p>Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle - width 400 mm, depth 400 mm Pack enclosure - width 300 mm</p>
Number of vertical modules [50 mm]	<p>9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure) 9 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure) 9 module(s) : INS250, direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : INS250, direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : INV100, direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : INV100, direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : INV160, direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : INV160, direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : INV200, direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : INV200, direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : INV250, direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : INV250, direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : NSX100...160 without earth leakage protection , front connection in 400 mm Wide cubicle 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure) 9 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : NSX250 without earth leakage protection , front connection in 400 mm Wide cubicle 9 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure) 13 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 13 module(s) : CVS100...160 with earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 13 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)</p>

13 module(s) : CVS250 with earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 13 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)
 13 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 11 module(s) : NSX100...160 with earth leakage protection , front connection in 400 mm Wide cubicle
 13 module(s) : NSX100...160 with earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure)
 13 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)
 13 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 11 module(s) : NSX250 with earth leakage protection , front connection in 400 mm Wide cubicle
 13 module(s) : NSX250 with earth leakage protection , direct with long terminal shield in 300 mm Wide Pack enclosure (cable coming from top or bottom of enclosure)

Condition of use	Need additional plate (1M high) when installation of device is in vertical
Height	250 mm
Product weight	0.54 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

Okolina

standards	IEC 61439-2
product certifications	ASEFA

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0807 - Schneider Electric declaration of conformity	Compliant - since 0807 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------