


03051

montažna ploča za vertikalnu zakretnu ručicu
NSX/CVS/INS 250, fiksna izvedba

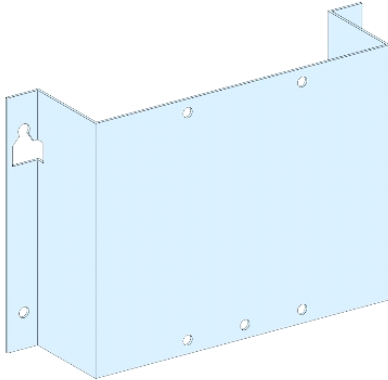

Glavno

Range	Prisma
Range compatibility	Prisma P Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Compact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation Compact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation Compact: fixed NSX250 without earth leakage protection - control: motor mechanism - vertical installation Compact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation Compact: plug-in NSX250 without earth leakage protection - control: motor mechanism - vertical installation Easypact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - vertical installation Easypact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - vertical installation
Poles description	1 x 3P: fixed: NSX100...160 vertical installation 1 x 3P: fixed: NSX250 vertical installation 1 x 3P: fixed: CVS100...160 vertical installation 1 x 3P: fixed: CVS250 vertical installation 1 x 4P: fixed: NSX100...160 vertical installation 1 x 4P: fixed: NSX250 vertical installation 1 x 4P: fixed: CVS100...160 vertical installation 1 x 4P: fixed: CVS250 vertical installation 1 x 3P: plug-in: NSX100...160 vertical installation 1 x 3P: plug-in: NSX250 vertical installation 1 x 4P: plug-in: NSX250 vertical installation 1 x 4P: plug-in: NSX100...160 vertical installation

Komplementarno

Enclosure/cubicle description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle - width 400 mm, depth 400 mm
Number of vertical modules [50 mm]	9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure) 9 module(s) : CVS250 without earth leakage protection , direct with long terminal

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i popunnu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)
 9 module(s) : CVS250 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)
 9 module(s) : NSX100...160 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 9 module(s) : NSX100...160 without earth leakage protection , front connection in 400 mm Wide cubicle
 9 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 300 mm Wide floor-standing duct (cable coming from top or bottom of enclosure)
 9 module(s) : NSX250 without earth leakage protection , direct with long terminal shield in 300 mm Wide wall-mounted duct (cable coming from top or bottom of enclosure)
 9 module(s) : NSX250 without earth leakage protection , front connection in 400 mm Wide cubicle

Condition of use	Need additional plate (1M high) when installation of device is in vertical
Height	300 mm
Product weight	0.5 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

Okolina

standards	IEC 61439-2
product certifications	ASEFA

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0807 - Schneider Electric declaration of conformity	Compliant - since 0807 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------