


## 03104

montažna ploča za horizontalni/vertikalni prekidač  
EZC250

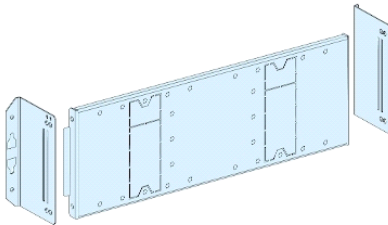

### Glavno

Range	Prisma
Range compatibility	Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	Easypact: fixed EZC250 without earth leakage protection - control: toggle - vertical installation Easypact: fixed EZCV250 with earth leakage protection - control: toggle - vertical installation Easypact: fixed EZC250 without earth leakage protection - control: toggle - horizontal installation Easypact: fixed EZCV250 with earth leakage protection - control: toggle - horizontal installation Easypact: fixed EZC100 without earth leakage protection - control: toggle - horizontal installation
Poles description	1 x 3P: fixed: EZC100 horizontal installation 1 x 3P: fixed: EZC250 horizontal installation 1 x 3P: fixed: EZCV250 horizontal installation 4 x 3P: fixed: EZC250 vertical installation 4 x 3P: fixed: EZCV250 vertical installation 1 x 4P: fixed: EZC100 horizontal installation 1 x 4P: fixed: EZC250 horizontal installation 1 x 4P: fixed: EZCV250 horizontal installation 3 x 4P: fixed: EZC250 vertical installation 3 x 4P: fixed: EZCV250 vertical installation

### Komplementarno

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Number of vertical modules [50 mm]	4 module(s) : EZC100 without earth leakage protection , direct in 600 mm Wide floor-standing enclosure 4 module(s) : EZC100 without earth leakage protection , direct in 600 mm Wide wall-mounted enclosure 4 module(s) : EZC250 without earth leakage protection , direct in 600 mm Wide floor-standing enclosure 4 module(s) : EZC250 without earth leakage protection , direct in 600 mm Wide wall-mounted enclosure 7 module(s) : EZC250 without earth leakage protection , direct in 600 mm Wide floor-standing enclosure 7 module(s) : EZC250 without earth leakage protection , direct in 600 mm Wide wall-mounted enclosure 4 module(s) : EZCV250 with earth leakage protection , direct in 600 mm Wide floor-standing enclosure 4 module(s) : EZCV250 with earth leakage protection , direct in 600 mm Wide wall-mounted enclosure 7 module(s) : EZCV250 with earth leakage protection , direct in 600 mm Wide floor-standing enclosure 7 module(s) : EZCV250 with earth leakage protection , direct in 600 mm Wide wall-mounted enclosure
Height	200 mm
Product weight	1.32 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White RAL 9001

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.  
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

## Okolina

standards	IEC 61439-2
product certifications	ASEFA

## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1018 - Schneider Electric declaration of conformity	Compliant - since 1018 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

## Contractual warranty

Warranty period	18 months
-----------------	-----------