

Podatkovni list proizvoda**Karakteristike****140AVO02000C**

analogni izlazni modul Modicon Quantum – 4 I

**Glavno**

Range of product	Modicon Quantum automation platform
Product or component type	Analogue output module

Komplementarno

Analogue output number	4
Addressing requirement	4 output words
Analogue output range	+/- 10 V >= 1000 Ohm bipolar voltage +/- 5 V >= 500 Ohm bipolar voltage 0...10 V >= 1000 Ohm unipolar voltage 0...5 V >= 500 Ohm unipolar voltage
Analogue output resolution	12 bits
Analogue output current	-10...10 mA
Source resistance	0.1 Ohm
Cable distance between devices	400 m
Absolute accuracy error	+/- 0.15 % of full scale at 25 °C
Linearity	+/- 1 LSB
Accuracy drift according to temperature	0.003 % of full scale/°C unipolar 0.004 % of full scale/°C bipolar 0.005 % of full scale/°C maximum unipolar 0.007 % of full scale/°C maximum bipolar
Isolation between channels	500 V for 1 minute 47...63 Hz AC
Isolation between channels and bus	780 V for 1 minute AC
Update time	3 ms
Setting time	700 µs to +/- 0.1 % of the final value maximum
Bus current requirement	700 mA
Power dissipation in W	<= 4.5 W
Associated fuse rating	0.063 mA 3 AG fast blow 250 V
Marking	CE
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault 4 LEDs green channel is turned on 4 LEDs red channel fault
Module format	Standard
Product weight	0.3 kg

Okolina

protective treatment	Conformal coating Humiseal 1A33
product certifications	CUL FM Class 1 Division 2
standards	CSA C22.2 No 142 UL 508
resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3

ambient air temperature for operation	0...60 °C
ambient air temperature for storage	-40...85 °C
relative humidity	95 % without condensation
operating altitude	<= 5000 m

Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 1012 - Schneider Electric declaration of conformity	Compliant - since 1012 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

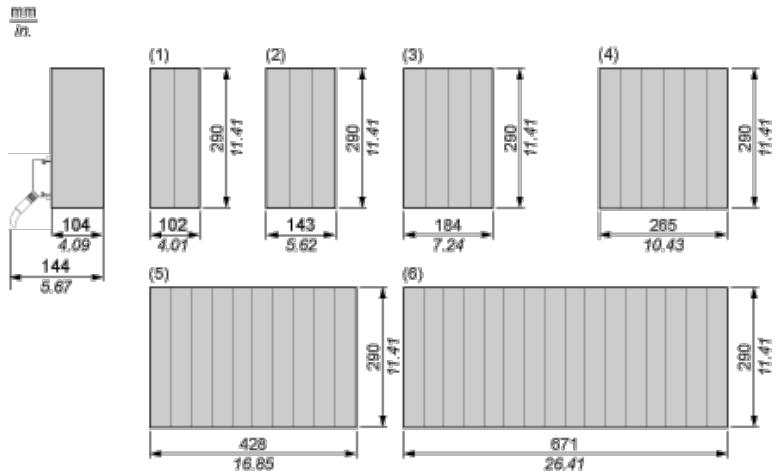

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Analog Output 4-Channel Voltage Module

Wiring Diagram

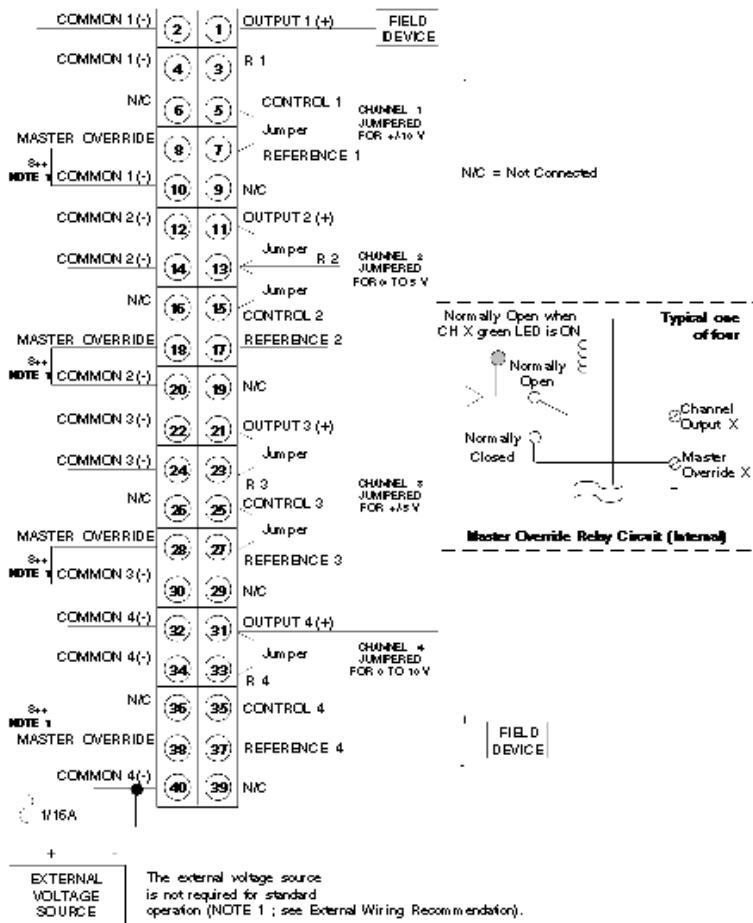

N/C Not Connected

External Wiring Recommendation

1. Master override is an input connected via an internal relay contact to the output when the module is not active. If connected to an external source, the master override input must be fused by a 1/16 A fuse.
2. If the master override is not connected to an external source, then it must be connected to common of that channel. The master override relay transition time is typically 2 ms.
3. The master override inputs must be from an external supply with a source impedance of <200 Ω or tied to system common. These inputs for channels that are in use should not be allowed to float and may be unique for each.