


## A9C15913

CDS – trofazni sklopnik za odbacivanje opterećenja –  
1 kanal po fazi

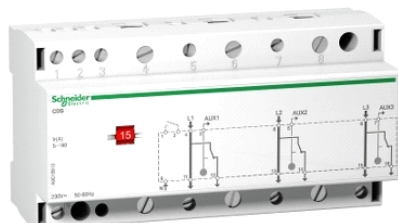

### Glavno

Range	Acti 9
Product name	Acti 9 CDS
Product or component type	Load-shedding contactor
Device short name	CDS
Number of channels	3
Control and monitoring type	Independant phase control
Poles description	3P

### Komplementarno

Setting	10 15 5 20 25 30 40 50 60 90 70 80
Power consumption in VA	12 VA
[Ue] rated operational voltage	415 V ( - 15...10 % ) AC 50/60 Hz
Rated current	Non-priority circuit: 15 A Priority circuit: adjustable from 5 to 90 A
Local signalling	3 LEDs yellow: load-shedding indication
Mounting support	35 mm symmetrical DIN rail Panel mounting Wall mounted
9 mm pitches	16
Connections - terminals	Non-priority circuit: screw terminal 2.5...10 mm <sup>2</sup> flexible wire(s) Non-priority circuit: screw terminal 2.5...10 mm <sup>2</sup> rigid wire(s) Priority circuit: screw terminal 10...35 mm <sup>2</sup> flexible wire(s) Priority circuit: screw terminal 10...50 mm <sup>2</sup> rigid wire(s)
IP degree of protection	IP20
Height	77 mm
Width	144 mm
Depth	60 mm
Product weight	0.5 kg
Colour	White RAL 9003
Tightening torque	
Wire stripping length	

### Okolina

standards	EN 50081-1 EN 50081-2 NF C 61-750
ambient air temperature for operation	-5...55 °C
ambient air temperature for storage	-40...70 °C
tropicalisation	2 conforming to IEC 60068-1

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.  
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

relative humidity

95 % (55 °C)

---

### Offer Sustainability

Not Green Premium product

Not Green Premium product

Will not be Compliant

Will not be Compliant

---

### Contractual warranty

Warranty period

18 months

---