


A9C18195

iMDU 24 – 48 V AC ili DC modul za prilagodbu napona

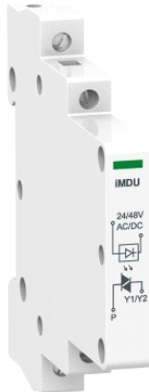

Glavno

Range	Acti 9
Product or component type	Voltage adaptor
Device short name	IMDU

Komplementarno

Range compatibility	Acti 9 Reflex iC60 Acti 9 RCA
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
[Uc] control circuit voltage	24...48 V AC/DC
Mounting mode	Fixed
Mounting support	35 mm symmetrical DIN rail
9 mm pitches	1
Height	78 mm
Width	9 mm
Depth	74 mm
Product weight	53 g
Colour	White
Auxiliary connection terminal	Tunnel type terminals cable(s) 1.5 mm ² rigid Tunnel type terminals cable(s) 1.5 mm ² flexible Tunnel type terminals cable(s) 1.5 mm ² flexible with ferrule
Wire stripping length	6 mm
Tightening torque	1 N.m
Compatibility code	IMDU

Okolina

IP degree of protection	IP20 conforming to IEC 60529 IP40 in modular enclosure (Insulation class II) conforming to IEC 60529
tropicalisation	2
relative humidity	95 % (55 °C)
ambient air temperature for operation	-20...60 °C
ambient air temperature for storage	-40...80 °C

Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0844 - Schneider Electric declaration of conformity	Compliant - since 0844 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------