


A9N18556

Vigi C120–dodatni blok za curenje struje prema zemlji–2P–300 mA–klasa A si

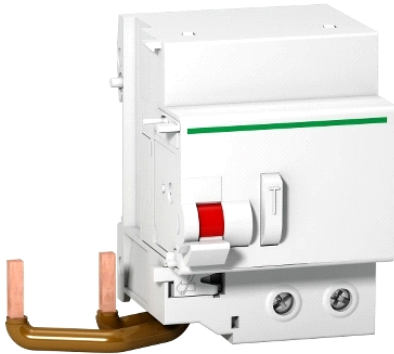

Glavno

Product or component type	Add-on residual current devices
Device short name	Vigi C120
Poles description	2P
[In] rated current	125 A
Network type	AC
Earth-leakage sensitivity	300 mA
Earth-leakage protection time delay	Selective
Earth-leakage protection class	Type A-SI

Komplementarno

Device location in system	Outgoer
Network frequency	50 Hz
[Ue] rated operational voltage	230...415 V AC 50 Hz
Residual current tripping technology	Voltage independent
[Ui] rated insulation voltage	500 V AC 50/60 Hz conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Mounting mode	Clip-on
Mounting support	35 mm symmetrical DIN rail
Electrical connection to mcb	By screws
9 mm pitches	7
Height	95 mm
Width	117 mm
Depth	73 mm
Product weight	0.325 kg
Colour	White
Mechanical durability	20000 cycles
Connections - terminals	Tunnel type terminals rigid wire(s) 1...50 mm ² max Tunnel type terminals flexible wire(s) 1...35 mm ² max
Wire stripping length	15 mm
Tightening torque	3.5 N.m

Okolina

standards	EN 61009
IP degree of protection	IP20
pollution degree	3 conforming to IEC 60947-2
ambient air temperature for operation	-25...60 °C
ambient air temperature for storage	-40...60 °C

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1201 - Schneider Electric declaration of conformity	Compliant - since 1201 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Available

Available

Need no specific recycling operations

Need no specific recycling operations

Contractual warranty

Warranty period

18 months
