


A9N18558

Vigi C120–dodatni blok za curenje struje prema zemlji–3P–300 mA–klasa A si

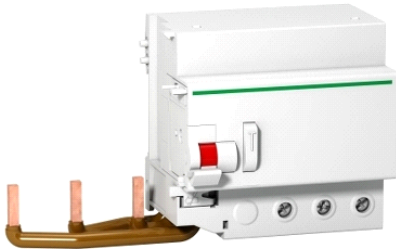

Glavno

| | |
|-------------------------------------|---------------------------------|
| Product or component type | Add-on residual current devices |
| Device short name | Vigi C120 |
| Poles description | 3P |
| [In] rated current | 125 A |
| Network type | AC |
| Earth-leakage sensitivity | 300 mA |
| Earth-leakage protection time delay | Selective |
| Earth-leakage protection class | Type A-SI |

Komplementarno

| | |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Device location in system | Outgoer |
| Network frequency | 50 Hz |
| [Ue] rated operational voltage | 230...415 V AC 50 Hz |
| Residual current tripping technology | Voltage independent |
| [Ui] rated insulation voltage | 500 V AC 50/60 Hz conforming to IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to IEC 60947-2 |
| Mounting mode | Clip-on |
| Mounting support | 35 mm symmetrical DIN rail |
| Electrical connection to mcb | By screws |
| 9 mm pitches | 10 |
| Height | 95 mm |
| Width | 171 mm |
| Depth | 73 mm |
| Product weight | 0.5 kg |
| Colour | White |
| Mechanical durability | 20000 cycles |
| Connections - terminals | Tunnel type terminals rigid wire(s) 1...50 mm ² max Tunnel type terminals flexible wire(s) 1...35 mm ² max |
| Wire stripping length | 15 mm |
| Tightening torque | 3.5 N.m |

Okolina

| | |
|---------------------------------------|-----------------------------|
| standards | EN 61009 |
| IP degree of protection | IP20 |
| pollution degree | 3 conforming to IEC 60947-2 |
| ambient air temperature for operation | -25...60 °C |
| ambient air temperature for storage | -40...60 °C |

Offer Sustainability

| | |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| Green Premium product | Green Premium product |
| Compliant - since 1201 - Schneider Electric declaration of conformity | Compliant - since 1201 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Available

Available

Need no specific recycling operations

Need no specific recycling operations

Contractual warranty

Warranty period

18 months
