


## A9V22263

Vigi iC60 – dodatni blok za propuštanje uzemljenja –  
2P – 63 A – 100 mA – Tip A

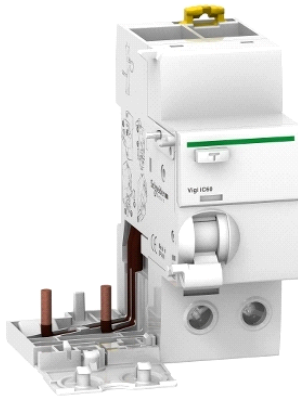

### Glavno

|                                     |   |
|-------------------------------------|---|
| Range                               | Acti 9  |
| Product or component type           | Add-on residual current devices   |
| Device short name                   | Vigi iC60   |
| Poles description                   | 2P  |
| [In] rated current                  | 63 A  |
| Earth-leakage sensitivity           | 100 mA  |
| Earth-leakage protection time delay | Instantaneous   |
| Earth-leakage protection class      | Type A  |
| Network type                        | AC  |
| Network frequency                   | 50/60 Hz  |
| [Ue] rated operational voltage      | 230/400 V AC 50/60 Hz conforming to EN 61009-1<br>230/415 V AC 50/60 Hz conforming to IEC 61009-1 |
| Standards                           | EN 61009-1<br>IEC 61009-1   |
| 9 mm pitches                        | 4   |

### Komplementarno

|  |  |
|--|--|
| Device location in system                        | Outgoer  |
| Residual current tripping technology             | Voltage independent  |
| [Ui] rated insulation voltage                    | 500 V AC 50/60 Hz conforming to IEC 60947-2  |
| [Uimp] rated impulse withstand voltage           | 6 kV conforming to IEC 60947-2   |
| Range compatibility                              | Acti 9 iC60<br>Acti 9 Reflex iC60  |
| Product compatibility                            | Single terminal  |
| Local signalling                                 | Trip indicator   |
| Mounting mode                                    | Clip-on  |
| Mounting support                                 | DIN rail   |
| Electrical connection to mcb                     | By screws  |
| Comb busbar and distribution block compatibility | Bottom: YES  |
| Height   | 91 mm  |
| Depth  | 73.5 mm  |
| Product weight                                   | 0.165 kg   |
| Connections - terminals                          | Tunnel type terminal downside 1 cable(s) 1...35 mm <sup>2</sup> rigid without cable end<br>Tunnel type terminal downside 1 cable(s) 1...25 mm <sup>2</sup> flexible without cable end<br>Tunnel type terminal downside 1 cable(s) 1...25 mm <sup>2</sup> flexible with cable end |
| Wire stripping length                            | 14 mm (bottom)   |
| Tightening torque                                | 3.5 N.m (bottom)   |

### Okolina

|                                       |  |
|---------------------------------------|--|
| IP degree of protection               | IP20 conforming to IEC 60529<br>IP40 modular enclosure conforming to IEC 60529 |
| pollution degree                      | 3 conforming to IEC 60947-2  |
| electromagnetic compatibility         | 8/20 µs impulse withstand 250 A conforming to IEC 61009-1                      |
| ambient air temperature for operation | -25...60 °C  |
| ambient air temperature for storage   | -40...85 °C  |

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

## Offer Sustainability

|   |   |
|---|---|
| Green Premium product   | Green Premium product   |
| Compliant - since 0627 - Schneider Electric declaration of conformity | Compliant - since 0627 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold                     | Reference not containing SVHC above the threshold                     |
| Available   | Available   |
| Need no specific recycling operations                                 | Need no specific recycling operations                                 |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|