


## ALB45255

Altira – 2 SO – 2P+E s roletama – bočno uzemljenje  
– žaruljica – crveni

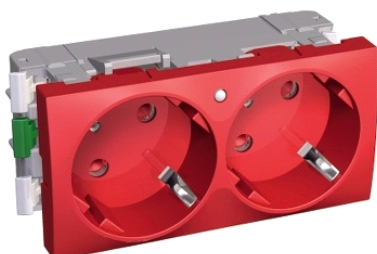

### Glavno

Range	Altira
Product or component type	Socket-outlet
Range compatibility	OptiLine 45 fixing frame OptiLine 70 with Altira adaptor fixing frame
Device presentation	Mechanism
Number of power socket outlets	2 2P + E German
Outlet standard description	Side earth
Socket additional information	Shuttered
Colour tint	Red (RAL 3000) cover plate

### Komplementarno

Product destination	Fixing frames
Range compatibility	OptiLine 45 OptiLine 70 with Altira adaptor
Ground lug position	Slanted 45° position
Rated current	16 A - 250 V - AC - 50/60 Hz
Number of modules	4 modules
Fixing mode	Clip-in
Pilot light	LED
Connections - terminals	Screwless terminals
Clamping connection capacity	4 x 1.5...4 x 2.5 mm <sup>2</sup> for rigid cable(s) 4 x 1.5...4 x 2.5 mm <sup>2</sup> for solid stranded cable(s)
Material	PC for mechanism cover
Surface treatment	Antibacterial
Surface finish	Satin
Standards	EN 60529 EN 62262 IEC 60884-1 NF C 61-314
Height	45 mm
Width	90 mm
Depth	39 mm
Product weight	0.089 kg

### Okolina

ambient air temperature for operation	5...50 °C
ambient air temperature for storage	-15...60 °C
IK degree of protection	IK02
IP degree of protection	IP20
environmental characteristic	Acetone Alcohol Ammonia Bleach Liquid soap Oil Petrol UV resistant Window-cleaning fluid

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

	Hydrogen peroxide (H2O2)
environmental health and issues	Halogen free

### Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0852 - Schneider Electric declaration of conformity	Compliant - since 0852 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

### Contractual warranty

Warranty period	18 months
-----------------	-----------