


ALB45267

Altira-3 SO-2P+E zaštita protiv otvaranja i rolete-
bočno uzem.-žaruljica-crvena

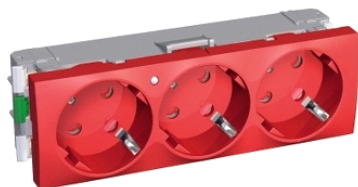

Glavno

Range	Altira
Product or component type	Socket-outlet
Range compatibility	OptiLine 45 fixing frame OptiLine 70 with Altira adaptor fixing frame
Device presentation	Mechanism
Number of power socket outlets	3 2P + E German
Outlet standard description	Side earth
Socket additional information	Red tamperproof Shuttered
Colour tint	Red (RAL 3000) cover plate

Komplementarno

Product destination	Fixing frames
Range compatibility	OptiLine 45 OptiLine 70 with Altira adaptor
Ground lug position	Slanted 45° position
Rated current	16 A - 250 V - AC - 50/60 Hz
Number of modules	6 modules
Fixing mode	Clip-in
Pilot light	LED
Connections - terminals	Screwless terminals
Clamping connection capacity	4 x 1.5...4 x 2.5 mm ² for rigid cable(s) 4 x 1.5...4 x 2.5 mm ² for solid stranded cable(s)
Material	PC for mechanism cover
Surface treatment	Antibacterial
Surface finish	Satin
Standards	EN 60529 EN 62262 IEC 60884-1 NF C 61-314
Height	45 mm
Width	135 mm
Depth	39 mm
Product weight	0.124 kg

Okolina

ambient air temperature for operation	5...50 °C
ambient air temperature for storage	-15...60 °C
IK degree of protection	IK02
IP degree of protection	IP20
environmental characteristic	Acetone Alcohol Ammonia Bleach Liquid soap Oil Petrol UV resistant Window-cleaning fluid Hydrogen peroxide (H2O2)

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili pružnika neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Offer Sustainability

Not Green Premium product

Not Green Premium product

Compliant - since 0850 - Schneider Electric declaration of conformity

Compliant - since 0850 - Schneider Electric declaration of conformity

Available

Available

Need no specific recycling operations

Need no specific recycling operations

Contractual warranty

Warranty period

18 months