



Glavno

Range of product	Modicon M340 automation platform
Product or component type	Processor module
Number of racks	2
Number of slots	11
Discrete I/O processor capacity	512 I/O single-rack configuration
Analogue I/O processor capacity	128 I/O multi-rack configuration 66 I/O single-rack configuration
Number of application specific channel	20
Monitoring	Diagnostic counters Modbus Event counters Modbus

Komplementarno

Control channels	Programmable loops
Integrated connection type	USB port 12 Mbit/s Non isolated serial link RJ45 character mode asynchronous in baseband RS232C full duplex 0.3...19.2 kbit/s 2 twisted shielded pairs Non isolated serial link RJ45 character mode asynchronous in baseband RS485 half duplex 0.3...19.2 kbit/s 1 twisted shielded pair Non isolated serial link RJ45 Modbus master/slave RTU/ASCII asynchronous in baseband RS232C half duplex 0.3...19.2 kbit/s 1 twisted shielded pair Non isolated serial link RJ45 Modbus master/slave RTU/ASCII asynchronous in baseband RS485 half duplex 0.3...19.2 kbit/s 1 twisted shielded pair
Communication module processor capacity	2 Ethernet communication module 2 AS-Interface module
Number of devices per segment	32 character mode 32 Modbus
Number of devices	2 point-to-point character mode 2 point-to-point Modbus
Bus length	0...10 m serial link non isolated character mode segment 0...10 m serial link non isolated Modbus segment 0...1000 m serial link isolated character mode segment 0...1000 m serial link isolated Modbus segment 0...15 m character mode point-to-point 0...15 m Modbus point-to-point
Tap links length	<= 15 m serial link non isolated character mode segment <= 15 m serial link non isolated Modbus segment <= 40 m serial link isolated character mode segment <= 40 m serial link isolated Modbus segment
Number of addresses	248 character mode 248 Modbus
Requests	1 K data bytes per request character mode 252 data bytes per RTU request Modbus 504 data bytes per ASCII request Modbus
Control parameter	One CRC on each frame (RTU) Modbus One LRC on each frame (ASCII) character mode One LRC on each frame (ASCII) Modbus
Memory description	Supplied memory card (BMXRMS008MP) for backup of programs, constants, symbols and data 2048 kB internal RAM 128 kB internal RAM for data 1792 kB internal RAM for program constants and symbols
Maximum size of object areas	128 kB unlocated internal data 16250 %Mi located internal bits 32464 %MWi internal words located internal data

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešku u potrošnji ili pogrešku u upotrebi ovdje sadržanih informacija.

	32760 %KWi constant words located internal data
Default size of object areas	128 %KWi constant words located internal data 256 %Mi located internal bits 512 %MWi internal words located internal data
Application structure	1 cyclic/periodic master task 1 periodic fast task 32 event tasks No auxiliary task
Execution time per instruction	0.18 μ s Boolean 0.26 μ s double-length words 0.38 μ s single-length words 1.74 μ s floating points
Number of instructions per ms	4.2 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 5.4 Kinst/ms 100 % Boolean
System overhead	0.2 ms fast task 1.05 ms master task
Current consumption	72 mA 24 V DC
Supply	Internal power supply via rack
Marking	CE
Status LED	1 LED green processor running (RUN) 1 LED red I/O module fault (I/O) 1 LED red memory card fault (CARD ERR) 1 LED red processor or system fault (ERR) 1 LED yellow activity on Modbus (SER COM)
Product weight	0.2 kg

Okolina

ambient air temperature for operation	0...60 °C
relative humidity	10...95 % without condensation
IP degree of protection	IP20
protective treatment	TC
directives	2012/19/EU - WEEE directive 2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
standards	EN 61000-6-2 EN 61000-6-4 EN 61010-2-201

Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 0722 - Schneider Electric declaration of conformity	Compliant - since 0722 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Modules Mounted on Racks

Dimensions

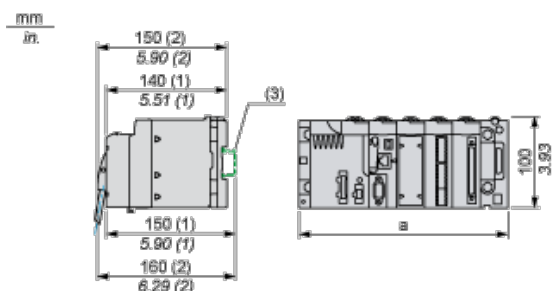

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81