

## BMXP342020

procesorski modul M340–maks. 1024 odvojenih +  
256 analognih U/I–Modbus–Ethernet



### Glavno

Range of product	Modicon M340 automation platform
Product or component type	Processor module
Concept	CANopen Transparent Ready
Number of racks	4
Number of slots	11
Discrete I/O processor capacity	1024 I/O multi-rack configuration 704 I/O single-rack configuration
Analogue I/O processor capacity	256 I/O multi-rack configuration 66 I/O single-rack configuration
Number of application specific channel	36
Monitoring	Diagnostic counters Modbus Event counters Modbus

### Komplementarno

Control channels	Programmable loops
Integrated connection type	USB port 12 Mbit/s Non isolated serial link RJ45 character mode asynchronous in baseband RS232C full duplex 0.3...19.2 kbit/s 2 twisted shielded pairs Non isolated serial link RJ45 character mode asynchronous in baseband RS485 half duplex 0.3...19.2 kbit/s 1 twisted shielded pair Non isolated serial link RJ45 Modbus master/slave RTU/ASCII asynchronous in baseband RS232C half duplex 0.3...19.2 kbit/s 1 twisted shielded pair Non isolated serial link RJ45 Modbus master/slave RTU/ASCII asynchronous in baseband RS485 half duplex 0.3...19.2 kbit/s 1 twisted shielded pair Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair
Communication module processor capacity	2 Ethernet communication module 4 AS-Interface module
Communication service	Bandwidth management, Ethernet TCP/IP Data Editor, Ethernet TCP/IP Modbus TCP messaging, Ethernet TCP/IP Rack Viewer, Ethernet TCP/IP SNMP network administrator, Ethernet TCP/IP
Port Ethernet	10BASE-T/100BASE-TX
Number of devices per segment	32 character mode 32 Modbus
Number of devices	2 point-to-point character mode 2 point-to-point Modbus
Bus length	0...10 m serial link non isolated character mode segment 0...10 m serial link non isolated Modbus segment 0...1000 m serial link isolated character mode segment 0...1000 m serial link isolated Modbus segment 0...15 m character mode point-to-point 0...15 m Modbus point-to-point
Tap links length	<= 15 m serial link non isolated character mode segment <= 15 m serial link non isolated Modbus segment <= 40 m serial link isolated character mode segment <= 40 m serial link isolated Modbus segment
Number of addresses	248 character mode 248 Modbus
Requests	1 K data bytes per request character mode 252 data bytes per RTU request Modbus 504 data bytes per ASCII request Modbus

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje nečije odgovarajuće primjene ili uporabu istog.  
Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Control parameter	One CRC on each frame (RTU) Modbus One LRC on each frame (ASCII) character mode One LRC on each frame (ASCII) Modbus
Memory description	Supplied memory card (BMXRMS008MP)for activation of standard web server, class B10 Supplied memory card (BMXRMS008MP)for backup of programs, constants, symbols and data 4096 kB internal RAM 256 kB internal RAMfor data 3584 kB internal RAMfor program constants and symbols
Maximum size of object areas	256 kB unlocated internal data 32634 %Mi located internal bits
Default size of object areas	1024 %MWi internal words located internal data 256 %KWi constant words located internal data 512 %Mi located internal bits
Application structure	1 cyclic/periodic master task 1 periodic fast task 64 event tasks No auxiliary task
Execution time per instruction	0.12 µs Boolean 0.17 µs double-length words 0.25 µs single-length words 1.16 µs floating points
Number of instructions per ms	6.4 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 8.1 Kinst/ms 100 % Boolean
System overhead	0.13 ms fast task 0.7 ms master task
Current consumption	95 mA 24 V DC
Supply	Internal power supply via rack
Marking	CE
Status LED	1 LED green activity on Ethernet network (ETH ACT) 1 LED green processor running (RUN) 1 LED green status of Ethernet network (ETH STS) 1 LED red data rate (ETH 100) 1 LED red I/O module fault (I/O) 1 LED red memory card fault (CARD ERR) 1 LED red processor or system fault (ERR) 1 LED yellow activity on Modbus (SER COM)
Product weight	0.205 kg

## Okolina

ambient air temperature for operation	0...60 °C
relative humidity	10...95 % without condensation
IP degree of protection	IP20
protective treatment	TC
directives	2012/19/EU - WEEE directive 2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
standards	EN 61000-6-2 EN 61000-6-4 EN 61131-2 EN 61010-2-201

## Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 0722 - Schneider Electric declaration of conformity	Compliant - since 0722 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Modules Mounted on Racks

### Dimensions

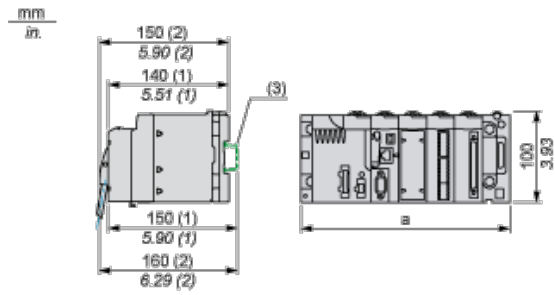

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81