


## DF103

osigurač–rastavljač TeSys 3P 32A – veličina osigurača 10 x 38 mm

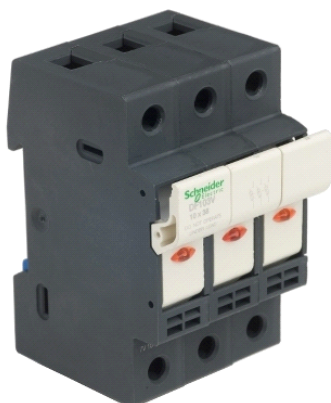

### Glavno

Range	TeSys
Product name	TeSys DF
Product or component type	Fuse-disconnector
Device short name	DF10
Poles description	3P

### Komplementarno

Mounting support	35 mm symmetrical DIN rail
Mounting position	Vertical +/- 23°
Control type	Toggle
[Ue] rated operational voltage	690 V AC 690 V DC
[Ie] rated operational current	32 A
[Uimp] rated impulse withstand voltage	6 kV
Fire resistance	960 °C conforming to IEC 60695-2-1
Short-circuit withstand	120 kA 400 V conforming to IEC 60947-3
Fuse size	10 x 38 mm
Fuse type	AM GG
[Ui] rated insulation voltage	1000 V AC
Connections - terminals	2 solid cable(s) 1...6 mm <sup>2</sup> on screw clamp terminals 1 solid cable(s) 1...16 mm <sup>2</sup> on screw clamp terminals 1 flexible cable(s) 1...16 mm <sup>2</sup> with or without cable end on screw clamp terminals 2 flexible cable(s) 1...6 mm <sup>2</sup> with or without cable end on screw clamp terminals
Tightening torque	2 N.m on screw clamp terminals - with screwdriver PZ2 2 N.m on screw clamp terminals - with screwdriver flat Ø 5.5 mm
Quantity per set	Set of 4

### Okolina

standards	IEC 60269-2 IEC 60269-2-1 IEC 60947-3 UL 512 CSA C22.2 No 39
product certifications	CSA UL recognized EAC
IP degree of protection	IP20
ambient air temperature for storage	-40...70 °C
ambient air temperature for operation	-40...70 °C with derating
height	88.5 mm
width	52.5 mm
depth	64 mm
product weight	0.126 kg

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

## Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0701 - Schneider Electric declaration of conformity	Compliant - since 0701 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

## Contractual warranty

Warranty period	18 months
-----------------	-----------