


GV2G245

Linery FT – Češljasta sabirnica – 63 A – 2 razvodne utičnice – razmak od 45 mm

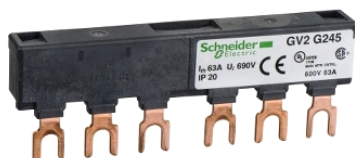

Glavno

| | |
|---|--|
| Range | Linery |
| Product name | FT |
| Device short name | GV2G |
| Product or component type | Comb busbar |
| Accessory / separate part category | Connection accessory |
| Poles description | 3P |
| Range compatibility | TeSys - GV2 TeSys - U TeSys - D TeSys - K |
| Number of tap-offs | 2 |
| [Ith] conventional free air thermal current | 63 A |
| Connection pitch | 45 mm |

Komplementarno

| | |
|-------------------------------|-------------|
| Mounting location | On terminal |
| [Ui] rated insulation voltage | 690 V |
| Length | 90 mm |
| Product weight | 0.036 kg |

Okolina


Offer Sustainability

| | |
|---|---|
| Green Premium product | Green Premium product |
| Compliant - since 0640 - Schneider Electric declaration of conformity | Compliant - since 0640 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |
| Available | Available |
| Need no specific recycling operations | Need no specific recycling operations |

Contractual warranty


| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Sets of Busbars GV2G... with Terminal Block GV1G09

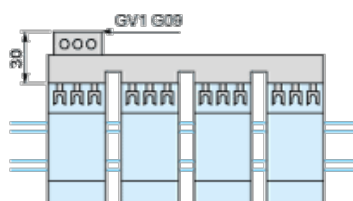

Sets of Busbars GV2G245, GV2G254, GV2GR272

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.



| | I |
|---------------------|-----|
| GV2G245 (2 x 45 mm) | 89 |
| GV2G254 (2 x 54 mm) | 98 |
| GV2G272 (2 x 72 mm) | 116 |