


GV3A09

TeSys GV3 – pomoćni kontakt – 1 NO raniji isklup
(kvar)

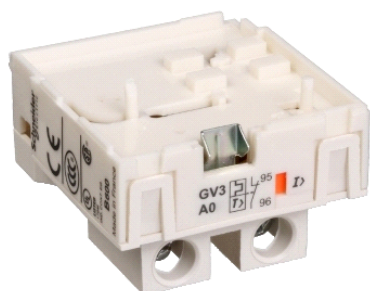

Glavno

Range	TeSys
Device short name	GV3A
Product or component type	Auxiliary contact block
Product compatibility	GV3ME
Mounting location	Front side
Auxiliary contacts operation	Fault signal 1 NO
Pole contact composition	1 NO
Connections - terminals	Screw clamp terminals 1 cable 1...2.5 mm ² - cable stiffness: solid Screw clamp terminals 2 cable 1...2.5 mm ² - cable stiffness: solid Screw clamp terminals 1 cable 0.75...2.5 mm ² - cable stiffness: flexible - without cable end Screw clamp terminals 2 cable 0.75...2.5 mm ² - cable stiffness: flexible - without cable end Screw clamp terminals 1 cable 0.75...2.5 mm ² - cable stiffness: flexible - with cable end Screw clamp terminals 2 cable 0.75...1.5 mm ² - cable stiffness: flexible - with cable end
Quantity per set	Set of 10

Komplementarno

[Ui] rated insulation voltage	600 V - conforming to UL 508 690 V - conforming to IEC 60947-1 600 V - conforming to CSA C22.2 No 14
[Ue] rated operational voltage	48...690 V AC 24...220 V DC
[Ith] conventional free air thermal current	6 A
Protection type	GB2CB... circuit breaker rating according to operational current for Ue ≤ 415 V GG fuse ≤ 6 A
Mechanical durability	1000 cycles
Rated operational power in VA	240 VA at 48 V AC-11 - electrical durability: 1000 cycles 450 VA at 440 V AC-11 - electrical durability: 1000 cycles 450 VA at 500 V AC-11 - electrical durability: 1000 cycles 200 VA at 690 V AC-11 - electrical durability: 1000 cycles 460 VA at 110...127 V AC-11 - electrical durability: 1000 cycles 800 VA at 220...240 V AC-11 - electrical durability: 1000 cycles 850 VA at 380...415 V AC-11 - electrical durability: 1000 cycles
Rated operational power in W	180 W at 24 V DC-11 - electrical durability: 1000 cycles 180 W at 48 V DC-11 - electrical durability: 1000 cycles 135 W at 60 V DC-11 - electrical durability: 1000 cycles 105 W at 110 V DC-11 - electrical durability: 1000 cycles 90 W at 220 V DC-11 - electrical durability: 1000 cycles
Width	9 mm
Product weight	0.03 kg

Okolina

environmental characteristic	Normal environment
------------------------------	--------------------

Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0723 - Schneider Electric declaration of conformity	Compliant - since 0723 - Schneider Electric declaration of conformity

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Reference contains SVHC above the threshold - go to CaP for more details

Reference contains SVHC above the threshold

Contractual warranty

Warranty period

18 months
