


## GVAE11

TeSys GV2 i GV3 – pomoćni kontakt – 1 NO + 1 NC

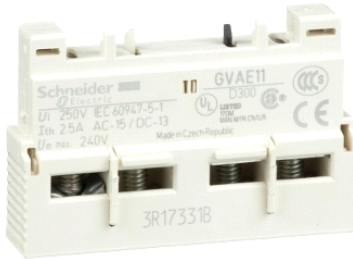

### Glavno

Range	TeSys
Device short name	GVAE
Product or component type	Auxiliary contact block
Product compatibility	GV2L GV2LE GV2ME GV2P GV2RT GV3L GV3P
Mounting location	Front side
Pole contact composition	1 NO + 1 NC
Connections - terminals	Screw clamp terminals 1 cable 1...2.5 mm <sup>2</sup> - cable stiffness: solid Screw clamp terminals 2 cable 1...2.5 mm <sup>2</sup> - cable stiffness: solid Screw clamp terminals 1 cable 0.75...2.5 mm <sup>2</sup> - cable stiffness: flexible - without cable end Screw clamp terminals 2 cable 0.75...2.5 mm <sup>2</sup> - cable stiffness: flexible - without cable end Screw clamp terminals 1 cable 0.75...1.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end
Quantity per set	Set of 10

### Komplementarno

[Ui] rated insulation voltage	250 V - conforming to IEC 60947-1 300 V - conforming to UL 508 300 V - conforming to CSA C22.2 No 14
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Rated operational power in VA	120 VA at 110...120 V AC-15 - electrical durability: 100000 cycles 120 VA at 230...240 V AC-15 - electrical durability: 100000 cycles 48 VA at 24 V AC-15 - electrical durability: 100000 cycles 60 VA at 48 V AC-15 - electrical durability: 100000 cycles
Rated operational power in W	15 W at 48 V DC-13 - electrical durability: 100000 cycles 24 W at 24 V DC-13 - electrical durability: 100000 cycles 9 W at 60 V DC-13 - electrical durability: 100000 cycles
Tightening torque	1.4 N.m - on screw clamp terminals
Height	11 mm
Width	45 mm
Depth	29 mm
Product weight	0.02 kg

### Okolina

environmental characteristic	Normal environment
------------------------------	--------------------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpuniju analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0701 - Schneider Electric declaration of conformity	Compliant - since 0701 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

## Contractual warranty

Warranty period	18 months
-----------------	-----------

GVAE11

