


KSB100SM412

Canalis-razvodna jed.za modularni uređaj-100 A-12 modula od 18 mm-3L + N + PE

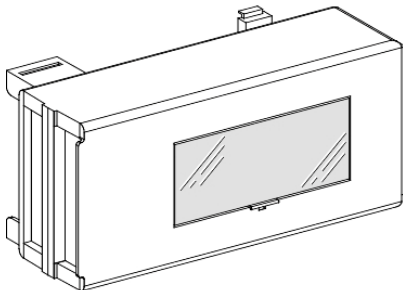

Glavno

Range of product	Canalis
Range compatibility	Canalis KT Canalis KS
Product or component type	Tap-off unit
Product compatibility	Canalis KS busbar trunking with plug-in outlets Canalis KT busbar trunking with KS type plug-in outlets
[Ie] rated operational current	100 A
Protection type	Circuit breaker : miniature circuit breaker (MCB)
Mounting mode	Plug-in with fixed polarity
Tap-off unit polarity	3L+N+PE
Colour	White RAL 9001

Komplementarno

Device application	Medium power distribution
Provided equipment	Circuit breaker to be ordered separately
[Ue] rated operational voltage	230...690 V depending on protective device
[Uimp] rated impulse withstand voltage	6.8 kV
[Ui] rated insulation voltage	400 V depending on protective device 500 V depending on protective device 690 V depending on protective device
Network frequency	50/60 Hz
Electrical connection	Lugs - ISO63 - cable : 35 mm ² flexible Lugs - ISO63 - cable : 35 mm ² rigid
Door opening side	Right
Tap-off unit disconnection mode	By opening the door
Standards	IEC 61439-1 IEC 61439-6
18 mm pitches	12
Width	444 mm
Depth	133 mm
Door opening size	545.5 mm
Height	220 mm
Product weight	5 kg

Okolina

earthing system	TT IT TN-S
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1012 - Schneider Electric declaration of conformity	Compliant - since 1012 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poipunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

