


KSB32CM55

Canalis-razvodna jedinica za 4 -polni modularni uređaj-32 A-5 modula od 18 mm

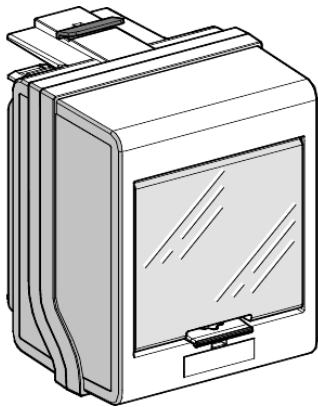

Glavno

Range of product	Canalis
Range compatibility	Canalis KS
Product or component type	Tap-off unit
Product compatibility	Canalis KS busbar trunking with plug-in outlets
[Ie] rated operational current	32 A
Protection type	Circuit breaker : miniature circuit breaker (MCB)
Mounting mode	Plug-in with fixed polarity
Tap-off unit polarity	3L+N+PE
Colour	White RAL 9001

Komplementarno

Device application	Medium power distribution
Provided equipment	Blanking plate Circuit breaker to be ordered separately
[Ue] rated operational voltage	230...690 V depending on protective device
[Uimp] rated impulse withstand voltage	6.8 kV
[Ui] rated insulation voltage	400 V depending on protective device 500 V depending on protective device 690 V depending on protective device
Network frequency	50/60 Hz
Electrical connection	Pre-wired terminal block - ISO32 - cable : 6 mm ² flexible Pre-wired terminal block - ISO32 - cable : 10 mm ² rigid
Door opening side	Front
Tap-off unit disconnection mode	By drawing out
Standards	IEC 61439-1 IEC 61439-6
18 mm pitches	5
Width	135 mm
Depth	108 mm
Height	175 mm
Product weight	0.6 kg

Okolina

earthing system	TT IT TN-S
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1012 - Schneider Electric declaration of conformity	Compliant - since 1012 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešku u potrošnji upotrebu ovdje sadržanih informacija.

Contractual warranty

Warranty period

18 months

