


MGU3.057.30TA

Unica Top/Class – 1 S.O. (poklopac) – 2P+E, rolete,
DE – 2 m – aluminij

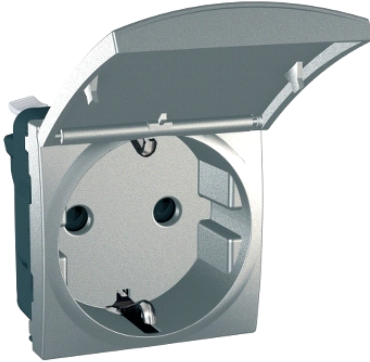

Glavno

| | |
|-----------------------------|-------------------------|
| Range | Unica |
| Device application | Power supply |
| Product or component type | Socket-outlet |
| Aesthetic name | Unica Top - Unica Class |
| Device presentation | Mechanism |
| Socket number | 1 |
| Outlet poles configuration | 2P + E with shutters |
| Outlet standard | German |
| Outlet standard description | Side earth |

Komplementarno

| | |
|--------------------------------|---|
| Cover type | Hinged cover |
| Rated current | 16 A, 250 V AC |
| Network frequency | 50/60 Hz |
| Number of modules | 2 modules |
| Fixing mode | Clip-in |
| Colour tint | Aluminium |
| Connections - terminals | Screwless terminals |
| Cable cross section | 0...4 mm ² - cable stiffness: flexible 0...4 mm ² - cable stiffness: rigid |
| Minimum load breaking capacity | 100 operations 1.25 I _n and 1.1 I _{un} , cos phi: 0.6 |
| Electrical durability | 10000 cycles (cos phi: 0.8) |
| Insulation resistance | > 5 MOhm @500 V |
| Dielectric strength | 2000 V |
| Material | Mechanism cover: ASA + PC |
| Quantity per set | Blister: set of 1 |
| Product certifications | 14.10.01/5433 FR.ME63.B02375 AC |
| Embedding depth | 30 mm |
| Depth | 40 mm |
| Width | 45 mm |
| Height | 45 mm |

Okolina

| | |
|---------------------------------------|--|
| ambient air temperature for operation | 15...30 °C |
| ambient air temperature for storage | 0...35 °C |
| IK degree of protection | IK01 |
| IP degree of protection | IP20 |
| environmental characteristic | Acetone Alcohol Ammonia Bleach Liquid soap Oil Petrol UV resistant Window-cleaning fluid |

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i popunivu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Offer Sustainability

| | |
|---|---|
| Green Premium product | Green Premium product |
| Compliant - since 0702 - Schneider Electric declaration of conformity | Compliant - since 0702 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |
| Available | Available |
| Need no specific recycling operations | Need no specific recycling operations |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|