


MGU3.572.12

Unica Wireless – kombinirani relej – 230 V AC – 0...
2300 W – 2 m – grafit

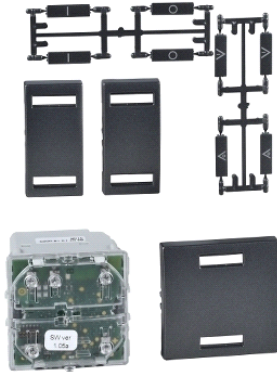

Glavno

Range of product	Unica Wireless
Product or component type	Combined relay
Device presentation	Mechanism
Transmission frequency	868 MHz
[Ue] rated operational voltage	110/230 V AC (+/- 10 %), 50/60 Hz
Number of modules	2 modules
Fixing mode	Clip-in
Colour tint	Graphite
Device composition	1 large rocker and 2 narrow rockers Wireless emitter and receiver
Provided equipment	Set of 8 symbols

Komplementarno

Wiring device mounting	Flush
Operating distance	Indoor: 10...50 m Outdoor: <= 300 m
Load type	230 V AC incandescent lamp - 2300 W 230 V AC halogen lamp - 2000 W 230 V AC compact fluorescent lamp - 880 VA 230 V AC fan - 690 W 230 V AC LED lamp - 880 W Low voltage halogen lamp with electronic transformer - 500 VA Low voltage halogen lamp with ferromagnetic transformer - 500 VA Low voltage halogen lamp with toroidal transformer - 500 VA Motor - 690 W Fluorescent tube (diameter: 28...38 mm): 1 1-10 V dimmable electronic ballast - 920 VA
Protection type	Fuse protection
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm ² for flexible cable(s) <= 2 x 2.5 mm ² for rigid cable(s)
Type of setting	Neutral position
Standards	73/23/EEC 89/336/EEC 99/5/EEC EN 60669-1 EN 60669-2-1 EN 61000-6-2 EN 61000-6-3 ETSI EN 300 220 ETSI EN 301 489
Ambient air temperature for operation	-5...50 °C
Relative humidity	20...95 %
Embedding depth	34 mm
Depth	46 mm

Okolina

IP degree of protection	IP20
environmental characteristic	Acetone Alcohol Ammonia

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Bleach
Liquid soap
Oil
Petrol
UV resistant
Window-cleaning fluid

environmental health and issues

Halogen free

Offer Sustainability

Green Premium product

Green Premium product

Compliant - since 1342 - Schneider Electric declaration of conformity

Compliant - since 1342 - Schneider Electric declaration of conformity

Reference contains SVHC above the threshold - go to CaP for more details

Reference contains SVHC above the threshold

Available

Available

Contractual warranty

Warranty period

18 months
