


## MGU3.572.30

Unica Wireless – kombinirani relej – 230 V AC – 0...  
2300 W – 2 m – aluminij

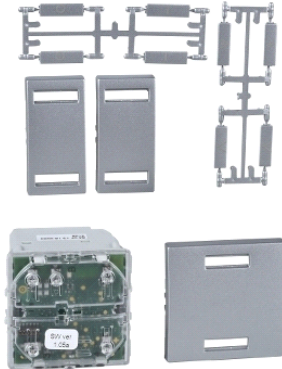

### Glavno

Range of product	Unica Wireless
Product or component type	Combined relay
Device presentation	Mechanism
Transmission frequency	868.3 MHz
[Ue] rated operational voltage	110/230 V AC (+/- 10 %), 50/60 Hz
Number of modules	2 modules
Fixing mode	Clip-in
Colour tint	Aluminium
Device composition	1 large rocker and 2 narrow rockers Wireless emitter and receiver
Provided equipment	Set of 8 symbols

### Komplementarno

Wiring device mounting	Flush
Operating distance	Indoor: 10...50 m Outdoor: <= 300 m
Load type	230 V AC incandescent lamp - 2300 W 230 V AC halogen lamp - 2000 W 230 V AC compact fluorescent lamp - 880 VA 230 V AC fan - 690 W 230 V AC LED lamp - 880 W Low voltage halogen lamp with electronic transformer - 500 VA Low voltage halogen lamp with ferromagnetic transformer - 500 VA Low voltage halogen lamp with toroidal transformer - 500 VA Motor - 690 W Fluorescent tube (diameter: 28...38 mm): 1 1-10 V dimmable electronic ballast - 920 VA
Protection type	Fuse protection
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm <sup>2</sup> for flexible cable(s) <= 2 x 2.5 mm <sup>2</sup> for rigid cable(s)
Type of setting	Neutral position
Standards	73/23/EEC 89/336/EEC 99/5/EEC EN 60669-1 EN 60669-2-1 EN 61000-6-2 EN 61000-6-3 ETSI EN 300 220 ETSI EN 301 489
Ambient air temperature for operation	-5...50 °C
Relative humidity	20...95 %
Embedding depth	34 mm
Depth	46 mm

### Okolina

IP degree of protection	IP20
environmental characteristic	Acetone Alcohol Ammonia

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu sadržanih informacija.

Bleach  
Liquid soap  
Oil  
Petrol  
UV resistant  
Window-cleaning fluid

---

environmental health and issues

Halogen free

---

### Offer Sustainability

---

Green Premium product

Green Premium product

---

Compliant - since 1342 - Schneider Electric declaration of conformity

Compliant - since 1342 - Schneider Electric declaration of conformity

---

Reference contains SVHC above the threshold - go to CaP for more details

Reference contains SVHC above the threshold

---

Available

Available

---

### Contractual warranty

---

Warranty period

18 months

---