


MIP22312T

mini Pragma kućište s prorezima – 3 x 12 modula –
prozirna vrata

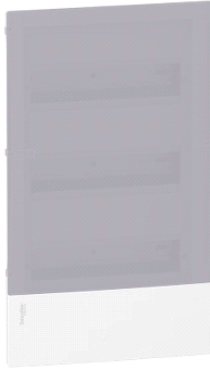

Glavno

Range	Mini Pragma
Product or component type	Enclosure
Enclosure type	Modular enclosure
Number of 18 mm modules per row	12
Number of horizontal rows	3
Type of front cover	Translucid
Width	270 mm wall 294 mm outside
Height	478 mm wall 502 mm outside
Depth	18 mm outside 80 mm wall 98 mm total
Embedding depth	80 mm

Komplementarno

Enclosure mounting	Flush
9 mm pitches	24
Total number of 18 mm modules	36
[In] rated current	63 A
Type of rail	35 mm asymmetrical rail
Cable entry	Pre-cutted holes
Terminal block function	Earth / neutral
Number of terminal blocks	1 earth terminal block with 20 screwed outgoers 1 neutral terminal block with 20 screwed outgoers
Distribution block outgoers	2 x 16 mm ² for earth 2 x 16 mm ² for neutral 9 x 10 mm ² for earth 9 x 10 mm ² for neutral 9 x 6 mm ² for earth 9 x 6 mm ² for neutral
Enclosure material	Back part: technoplastic Door: technoplastic Front face: technoplastic
Colour	Front face: white (RAL 9003) Door: translucid

Okolina

standards	EN 50102 IEC 529 IEC 60439-3 IEC 60670-24 IEC 60695-2-11
quality labels	IMQ
fire resistance	Door: 650 °C Front face: 650 °C Back part: 650 °C
IP degree of protection	IP40
IK degree of protection	IK07

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

ambient air temperature for operation

-25...60 °C

Offer Sustainability

Green Premium product

Green Premium product

Compliant - since 0901 - Schneider Electric declaration of conformity

Compliant - since 0901 - Schneider Electric declaration of conformity

Reference not containing SVHC above the threshold

Reference not containing SVHC above the threshold

Available

Available

Need no specific recycling operations

Need no specific recycling operations

Contractual warranty

Warranty period

18 months