


## NSYTBS11116

Kutija ABS IP66 IK07 RAL7035 Unut.V105 Š105 D55  
Vanj.V116 Š116 D62,nepr.pok.H10

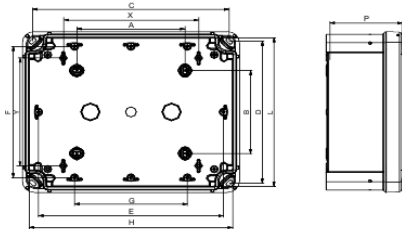

### Glavno

|                           |   |
|---------------------------|---|
| Range                     | Thalassa  |
| Product name              | Thalassa TBS  |
| Device application        | Multi-purpose                                       |
| Product or component type | Industrial box                                      |
| Height                    | 116 mm  |
| Width                     | 116 mm  |
| Depth                     | 62 mm   |
| Internal height           | 105 mm  |
| Internal width            | 105 mm  |
| Internal depth            | 55 mm   |
| Enclosure mounting        | Wall mounted  |
| Device composition        | 1 x body<br>1 x cover<br>4 x cover screw            |
| Quantity per set          | Set of 5  |
| Body type                 | One piece moulded                                   |
| Type of front cover       | Low plain cover                                     |
| Cover fixing              | Plastic screws                                      |
| Lock type                 | Outside sealed area: flat screwdriver captive screw |
| Removable parts           | Cover, by captive screws                            |

### Komplementarno

|                                       |                                       |
|---------------------------------------|---------------------------------------|
| Material                              | ABS (acrylonitrile butadiene-styrene) |
| Colour                                | Grey ( RAL 7035 )                     |
| Standards                             | IEC 62208                             |
| Product certifications                | DEMKO<br>SEMKO<br>TÜV                 |
| Electrical insulation class           | Class II                              |
| IP degree of protection               | IP66 conforming to NEMA 4.4X          |
| IK degree of protection               | IK07 conforming to IEC 62262          |
| Fire resistance                       | 650 °C conforming to IEC 60695-2-11   |
| Ambient air temperature for storage   | -15...40 °C                           |
| Ambient air temperature for operation | -25...60 °C                           |
| Product weight                        | 0.151 kg                              |

### Okolina

#### Offer Sustainability

|  |   |
|--|---|
| Not Green Premium product  | Not Green Premium product   |
| Compliant - since 0940 - Schneider Electric declaration of conformity    | Compliant - since 0940 - Schneider Electric declaration of conformity |
| Reference contains SVHC above the threshold - go to CaP for more details | Reference contains SVHC above the threshold                           |
| Need no specific recycling operations                                    | Need no specific recycling operations                                 |

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Contractual warranty

Warranty period

18 months