


## R9XFH418

Resi9 - češljasta sabirnica - 3L+N - povezivanje 18 mm - 18 modula - 63 A

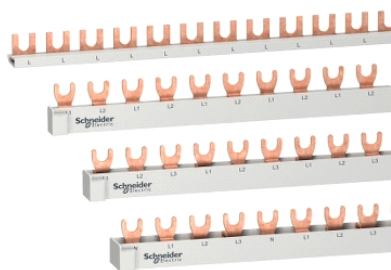

### Glavno

|                                    |                      |
|------------------------------------|----------------------|
| Range                              | Resi9                |
| Product or component type          | Comb busbar          |
| Accessory / separate part category | Connection accessory |
| Lines description                  | 3L + N               |
| Total number of 18 mm modules      | 18                   |

### Komplementarno

|                                |                                                                     |
|--------------------------------|---------------------------------------------------------------------|
| Number of ways                 | 4 ways N + 3 L                                                      |
| Poles configuration for 1 way  | 1 x 3P + N<br>1 x 4P                                                |
| Connection pitch               | 18 mm                                                               |
| Connector type                 | Fork                                                                |
| Distance between way           | 72 mm                                                               |
| Marking                        | N L1 L2 L3                                                          |
| Insulation                     | Insulated                                                           |
| Device presentation            | Cuttable                                                            |
| [Ie] rated operational current | 63 A ( 40 °C )                                                      |
| [Ue] rated operational voltage | 400 V AC Ph/Ph<br>230 V AC Ph/N                                     |
| [Ui] rated insulation voltage  | 500 V AC                                                            |
| Mounting mode                  | Horizontal                                                          |
| Mounting location              | Bottom on biconnect                                                 |
| 9 mm pitches                   | 36                                                                  |
| Width                          | 320 mm                                                              |
| Colour                         | White ( RAL 9003 )                                                  |
| Range compatibility            | Acti 9 K60<br>Resi9 MCB<br>Resi9 RCBO<br>Resi9 RCCB<br>Resi9 SWITCH |

### Okolina

|                        |                                             |
|------------------------|---------------------------------------------|
| standards              | IEC 61439-2<br>IEC 60947-7-1                |
| product certifications | CE                                          |
| fire resistance        | 960 °C ( 30 s ) conforming to IEC 60695-2-1 |
| pollution degree       | 3                                           |

### Offer Sustainability

|                                                                       |                                                                       |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| Green Premium product                                                 | Green Premium product                                                 |
| Compliant - since 1329 - Schneider Electric declaration of conformity | Compliant - since 1329 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold                     | Reference not containing SVHC above the threshold                     |

---

|                                       |                                       |
|---------------------------------------|---------------------------------------|
| Available                             | Available                             |
| Need no specific recycling operations | Need no specific recycling operations |

---