



Glavno

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate

Komplementarno

Product compatibility	RXG plug-in relay 1 C/O
[Ui] rated insulation voltage	250 V
[Uimp] rated impulse withstand voltage	6 kV
[In] rated current	10 A
[Ue] rated operational voltage	250 V conforming to IEC 300 V conforming to UL
Connections - terminals	Screw terminals, clamping capacity: 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Screw terminals, clamping capacity: 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw terminals, clamping capacity: 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Screw terminals, clamping capacity: 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end
Screw type	M3

Okolina


ambient air temperature for storage	-40...85 °C
ambient air temperature for operation	-40...70 °C
relative humidity	10...85 %
standards	IEC 61984 UL 508 CSA C22.2 No 14
product certifications	CE CSA RoHS UL REACH EAC China RoHS
IP degree of protection	IP20
overvoltage category	III
pollution degree	3

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1426 - Schneider Electric declaration of conformity	Compliant - since 1426 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Dimensions

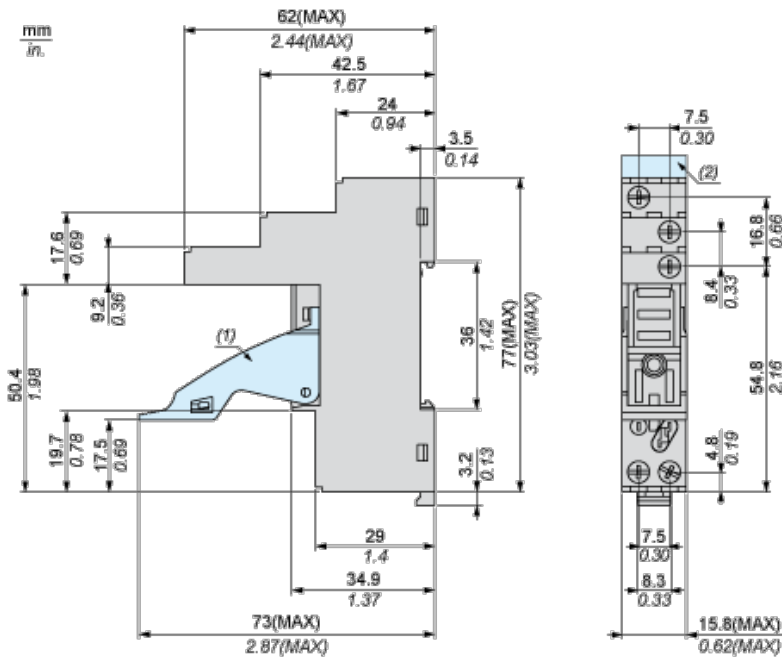

- (1) Maintaining clamp
- (2) Legends

Wiring Diagram

