

SR2MOD02

sučelje modema – GSM – za komunikacijsko sučelje
SR2COM01



Glavno

| | |
|---------------------------|---|
| Range of product | Zelio Logic |
| Product or component type | GSM modem |
| Type of modem | Type quad band 900/1800 MHz, 850/1900 MHz |
| Data backed up | Flash memory |

Komplementarno

| | |
|---------------------------|--|
| Kit composition | 1 antenna with cable 1 supply cable 2 lugs for plate mounting Fixing on DIN rail (assembled with the GSM modem) GSM modem |
| Function available | Send alarm/receive instruction Send alarm to e-mail address Transfer program Update firmware monitoring |
| Number of messages | <= 28 |
| Electrical data recording | Date and time Discrete and digital value Telephone/e-mail |
| [Us] rated supply voltage | 12...24 V DC |
| Supply voltage limits | 5.5...32 V |
| Supply current | 165 mA at 12 V <= 2100 mA at 5.5 V 87 mA at 24 V |
| Power dissipation in W | 2.1 W |
| Associated fuse rating | 2.5 A |
| Electrical connection | 1 antenna with cable 1 cable 1 cable Com-M Com-M specific to Zelio RS232 serial, specific Zelio communication protocol for link with the modem, AT commands 1 cable Com-Z Com-Z specific to Zelio, specific Zelio communication protocol for Zelio Logic smart relays SR.B..... and SR2 E..... Version (>= V3.1) Supply cable |
| Cable length | 1.5 m supply cable 2.5 m antenna with cable |
| Insulation | 1780 V optocoupler, connector type: Com-Z specific to Zelio By the cable SR2 CBL07, connector type: Com-M specific to Zelio |
| Connections - terminals | Screw terminals, 1 x 0.25...1 x 2.5 mm ² , AWG 24...AWG 14, semi-solid cable Screw terminals, 1 x 0.25...1 x 2.5 mm ² , AWG 24...AWG 14, solid cable Screw terminals, 2 x 0.25...2 x 1.5 mm ² , AWG 23...AWG 16, solid cable Screw terminals, 1 x 0.25...1 x 2.5 mm ² , AWG 24...AWG 14, flexible cable with cable end Screw terminals, 2 x 0.25...2 x 0.75 mm ² , AWG 24...AWG 18, flexible cable with cable end |
| Tightening torque | 0.5 N.m |
| Product weight | 0.335 kg |

Okolina

| | |
|------------------------|-----|
| product certifications | CSA |
|------------------------|-----|

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

C-Tick
 FCC part 15 standard
 GOST
 IC
 PTCRB
 UL

| | |
|---------------------------------------|---|
| standards | EN/IEC 60068-2-32 EN/IEC 60068-2-6 Fc |
| electromagnetic compatibility | Conducted and radiated emissions, class B group 1 conforming to EN 55022-11 |
| IP degree of protection | IP31 conforming to IEC 60529 |
| environmental characteristic | Low voltage directive conforming to EN/IEC 60950-1 R and TTE directive conforming to ETSI EN 301419-1 R and TTE directive conforming to ETSI EN 301 489-7 R and TTE directive conforming to ETSI EN 301 511 EMC directive conforming to ETSI EN 301 489-1 |
| pollution degree | 2 conforming to EN/IEC 61131-2 |
| ambient air temperature for operation | -20...55 °C conforming to IEC 60068-2-1 -20...55 °C conforming to IEC 60068-2-2 |
| ambient air temperature for storage | -40...70 °C |
| operating altitude | 2000 m |
| altitude transport | <= 3048 m |
| relative humidity | 0...95 % at 55 °C without condensation 0...95 % without condensation, during storage |

Offer Sustainability


| | |
|---|---|
| Not Green Premium product | Not Green Premium product |
| Compliant - since 0626 - Schneider Electric declaration of conformity | Compliant - since 0626 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

GSM Modem

Rail Mounting

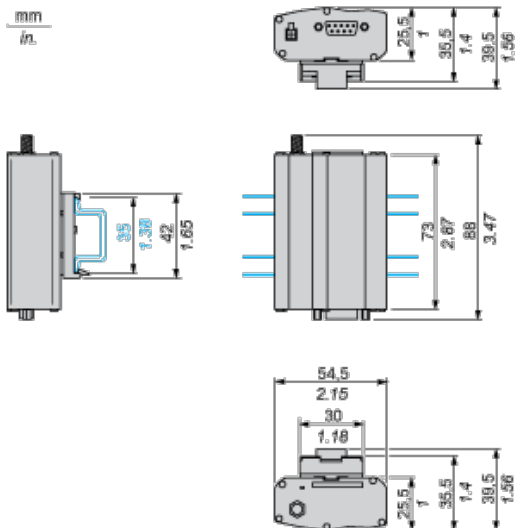

Screw Fixing

mm
in.

