

SSM1A112B7R

beskontaktni relej - DIN vodilica - ulaz 18-36 V AC,
izlaz 24-280 V AC, 12 A



Glavno

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	1
Network number of phases	1 phase

Komplementarno

Mounting support	Symmetrical DIN rail
[In] rated current	12 A
Output voltage	24...280 V AC
[Uc] control circuit voltage	18...36 V AC
Contacts type and composition	1 NO
Tightening torque	Input : 0.5...0.8 N.m Output : 0.5...0.8 N.m
Connections - terminals	Screw terminals : 1 x 0.3...1 x 1.5 mm ² , (AWG 22...AWG 16)for input Screw terminals : 1 x 0.3...1 x 2.5 mm ² , (AWG 22...AWG 14)for output
Capacitance unbalance	<= 10 pF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED green for input status
Minimum switching voltage	18 V AC turn-on
Maximum switching voltage	4 V AC turn-off
Input current limits	3.5...8.5 mA
Solid state output type	SCR output Random voltage switching
Load current	0.00015...12 A
Absolute maximum voltage	600 V
Surge current	<= 715 Afor 16.6 ms <= 750 Afor 20 ms
Voltage drop	<= 1.3 V on-state
Motor power hp	0.33 hp at 40 °C 240 V AC
Maximum I ² t for fusing	2560 A ² .sfor 10 ms at 50 Hz half cycle 2330 A ² .sfor 8.33 ms at 60 Hz half cycle
Leakage current	<= 0.1 mA off-state
DV/dt	500 V/μs off-state at maximum voltage
Response time	30 ms turn-off 20 ms turn-on
Cos phi	>= 0.5 with maximum load
Overvoltage category	III
Width	18 mm
Height	90.3 mm
Depth	83.7 mm
Product weight	0.09 kg

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.


Okolina

flame retardance	V0 conforming to UL 94
dielectric strength	4 kV ACfor input/output 4 kV ACfor input or output to case
pollution degree	2
standards	IEC 61000 IEC 60950-1 IEC 62314
product certifications	CSA UL REACH
marking	CE
IP degree of protection	IP20
ambient air temperature for operation	-30...80 °C
ambient air temperature for storage	-30...100 °C


Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1328 - Schneider Electric declaration of conformity	Compliant - since 1328 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

Dimensions

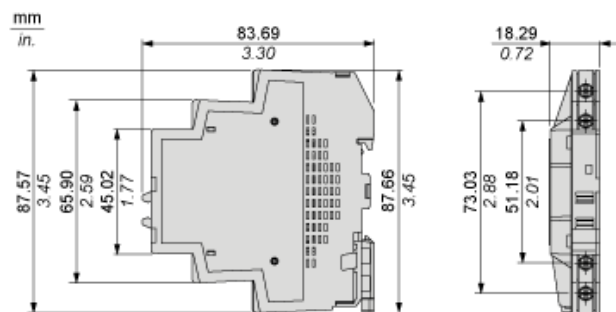

Derating Curves

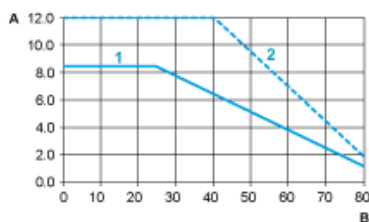

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 18 mm