

SSM1D26BD

beskontaktni relej - DIN vodilica - ulaz 4-32 V DC,
izlaz 1-60 V AC, 6 A



Glavno

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	1
Network number of phases	1 phase

Komplementarno

Mounting support	Symmetrical DIN rail
[In] rated current	6 A
Output voltage	1...60 V DC
[Uc] control circuit voltage	4...32 V DC
Contacts type and composition	1 NO
Tightening torque	Input : 0.5...0.8 N.m Output : 0.5...0.8 N.m
Connections - terminals	Screw terminals : 1 x 0.3...1 x 1.5 mm ² , (AWG 22...AWG 16)for input Screw terminals : 1 x 0.3...1 x 2.5 mm ² , (AWG 22...AWG 14)for output
Capacitance unbalance	<= 10 pF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED green for input status
Minimum switching voltage	4 V DC turn-on
Maximum switching voltage	1 V DC turn-off
Input current limits	8...11 mA
Solid state output type	Mosfet output DC switching
Load current	0.0025...6 A
Absolute maximum voltage	60 V
Surge current	<= 60 Afor 10 ms
Voltage drop	<= 0.6 V on-state
Resistance	0.1 Ohm on-state
Leakage current	<= 0.1 mA off-state
Response time	0.6 ms turn-on 0.3 ms turn-off
Overvoltage category	III
Width	11 mm
Height	90.3 mm
Depth	83.7 mm
Product weight	0.05 kg

Okolina

flame retardance	V0 conforming to UL 94
dielectric strength	4 kV DCfor input/output 4 kV DCfor input or output to case


Informacije dane u ovoj dokumentaciji sadrže opće i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

pollution degree	2
standards	IEC 61000 IEC 60950-1 IEC 62314
product certifications	CSA UL REACH
marking	CE
IP degree of protection	IP20
ambient air temperature for operation	-30...80 °C
ambient air temperature for storage	-30...100 °C


Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1328 - Schneider Electric declaration of conformity	Compliant - since 1328 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

Dimensions

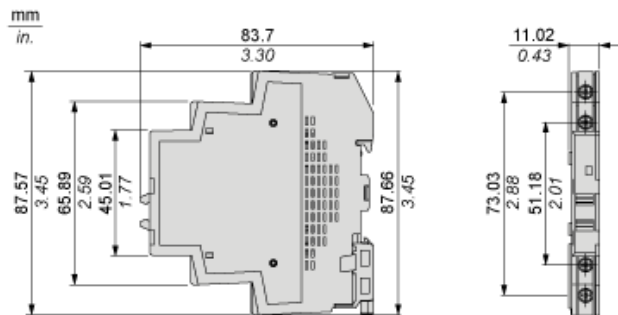

Derating Curves

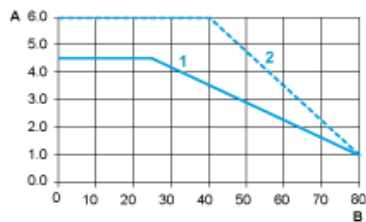

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 11 mm