


TCSESM083F1CU0

sklopka s Ethernet TCP/IP upravljanjem – ConneXium
– 7TX/1FX – više načina

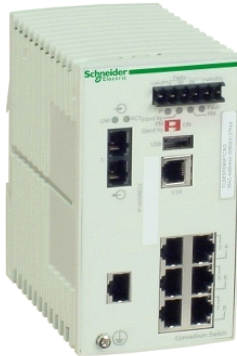

Glavno

Range of product	ConneXium
Product or component type	Ethernet TCP/IP managed switch
Concept	Transparent Ready
Communication port protocol	Ethernet TCP/IP
Port Ethernet	100BASE-FX - 1 port(s) fiber optic 10BASE-T/100BASE-TX - 7 port(s) copper cable
Maximum number of switches in cascade	Unlimited

Komplementarno

Integrated connection type	Duplex SC fiber optic Shielded RJ45 copper cable
Transmission support medium	Twisted shielded pairs cable CAT 5E for copper cable Multimode optical fiber for fiber optic
Attenuation	11 dB 62.2/125 μm 8 dB 50/125 μm
Ethernet service	Configuration via web server Data stream control FDR IGMP Snooping Multicast filtering Priority port Rapid Scanning Tree Protocol (RSTP) Secure port SMTP V3 SNTP client VLAN
Maximum number of switches in a ring	50
Redundancy	Redundant power supplies Redundant single ring Ring coupling
[Us] rated supply voltage	24 V
Supply voltage limits	18...30 V AC SELV 9.6...60 V DC SELV
Power consumption in W	6.5 W
Electrical connection	Removable connector 6 ways power supply
Mounting support	35 mm symmetrical DIN rail
Marking	CE
Local signalling	1 LED fault 2 LEDs P1 P2 power supplies 1 LED ring manager 1 LED stand-by 1 LED per channel copper port activity 1 LED per channel copper port status
Alarm output	1 voltfree contact 1 A
Alarm function	Power supply fault Switch fault Data link status Redundancy ring fault
Ethernet cabling system	TF switches
Width	74 mm

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Height	131 mm
Depth	111 mm
Product weight	0.41 kg

Okolina

ambient air temperature for operation	0...60 °C
relative humidity	10...95 % without condensation
IP degree of protection	IP20
standards	EN/IEC 61131-2 UL 1604 Class 1 Division 2 UL 508 CSA C22.2 No 213 Class I Division 2 CSA C22.2 No 214
product certifications	C-Tick GL

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0614 - Schneider Electric declaration of conformity	Compliant - since 0614 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------