


VW3A3411

kartica sučelja enkodera s diferenc.izlazima kompat.s
RS422 s emulacijom enkoder

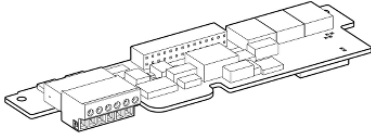

Glavno

Range of product	Altivar
Product or component type	Encoder interface card
Range compatibility	Altivar 71 Altivar Lift Altivar 71Q
Discrete output type	Differential
Communication port protocol	RS422
[Us] rated supply voltage	5 V (voltage limits: 5...5.5 V) 15 V (voltage limits: 15...16 V)
Number of pulses per revolution	<= 10000

Komplementarno

Product compatibility	ATV71H...M3383 ATV71H...M3X383 ATV71H...N4383
Supply current	<= 0.2 A
Protection type	Overload protection Short-circuit protection
Maximum operating frequency	300 kHz
Input signal	A B Compliment of A Compliment of B Compliment of Z Z
Input impedance	440 Ohm
Output signal	A compliment of A A compliment of A B compliment of B A compliment of A B compliment of B Z compliment of Z
Ratio	1, 1/2, 1/4, 1/8, 1/16, 1/32 or 1/64
Electrical connection	Terminal, connection capacity: 0.5 mm ² (AWG 20) 25 m cable length (encoder 100 mA) at 4.75 V Terminal, connection capacity: 0.5 mm ² (AWG 20) 25 m cable length (encoder 100 mA) at 14.75 V Terminal, connection capacity: 0.75 mm ² (AWG 18) 50 m cable length (encoder 100 mA) at 4.75 V Terminal, connection capacity: 0.75 mm ² (AWG 18) 50 m cable length (encoder 100 mA) at 14.75 V Terminal, connection capacity: 1 mm ² (AWG 17) 25 m cable length (encoder 200 mA) at 4.75 V Terminal, connection capacity: 1.5 mm ² (AWG 15) 50 m cable length (encoder 200 mA) at 4.75 V Terminal, connection capacity: 1.5 mm ² (AWG 15) 50 m cable length (encoder 200 mA) at 14.75 V Terminal, connection capacity: 0.2 mm ² (AWG 24) 25 m cable length (encoder 100 mA) at 14.75 V Terminal, connection capacity: 0.2 mm ² (AWG 24) 25 m cable length (encoder 50 mA) at 14.75 V Terminal, connection capacity: 0.2 mm ² (AWG 24) 25 m cable length (encoder 50 mA) at 4.75 V Terminal, connection capacity: 0.5 mm ² (AWG 20) 100 m cable length (encoder 50 mA) at 14.75 V Terminal, connection capacity: 0.5 mm ² (AWG 20) 25 m cable length (encoder 200 mA) at 14.75 V Terminal, connection capacity: 0.5 mm ² (AWG 20) 50 m cable length (encoder 50 mA) at 4.75 V Terminal, connection capacity: 0.75 mm ² (AWG 18) 100 m cable length (encoder 50 mA) at 4.75 V Terminal, connection capacity: 0.75 mm ² (AWG 18) 50 m cable length (encoder 200

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

mA) at 14.75 V
Terminal, connection capacity: 1 mm² (AWG 17) 200 m cable length (encoder 50 mA) at 14.75 V
Terminal, connection capacity: 1.5 mm² (AWG 15) 100 m cable length (encoder 100 mA) at 4.75 V
Terminal, connection capacity: 1.5 mm² (AWG 15) 200 m cable length (encoder 100 mA) at 14.75 V
Terminal, connection capacity: 1.5 mm² (AWG 15) 200 m cable length (encoder 50 mA) at 4.75 V
Terminal, connection capacity: 1.5 mm² (AWG 15) 300 m cable length (encoder 50 mA) at 14.75 V

Product weight	0.2 kg
----------------	--------

Okolina

Contractual warranty

Warranty period	18 months
-----------------	-----------
