



### Glavno

Product or component type	Braking resistor
---------------------------	------------------

### Komplementarno

Range compatibility	Altivar Process ATV900 Altivar Machine ATV340
Product compatibility	Variable speed drive ATV930 wall mount 37 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 45 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 90 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 37 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 45 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 90 kW 380...480 V severe cycle Variable speed drive ATV340 30 kW 380...480 V severe cycle Variable speed drive ATV340 37 kW 380...480 V severe cycle Variable speed drive ATV340 75 kW 380...480 V severe cycle 2 per drive Variable speed drive ATV930 45 kW 500...690 V severe cycle Variable speed drive ATV930 55 kW 500...690 V severe cycle Variable speed drive ATV930 60 hp 600 V severe cycle Variable speed drive ATV930 75 hp 600 V severe cycle
Duty cycle	Severe cycle (heavy duty) : 54 s braking with 100 % braking torque for a 120 s cycle Severe cycle (heavy duty) : 6 s braking with 165 % braking torque for a 120 s cycle
Average power available	19 kW at 50 °C
Ohmic value	10 Ohm
Electrical connection	Terminal, clamping capacity: <= 2.5 mm <sup>2</sup> , AWG 12 for temperature control switch M12 bar wire for drive
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	540 mm
Height	1035 mm
Depth	860 mm
Product weight	67 kg

### Okolina

ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...70 °C
IP degree of protection	IP23


### Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 1533 - Schneider Electric declaration of conformity	Compliant - since 1533 - Schneider Electric declaration of conformity

### Dimensions

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje specifičnu primjenu ili uporabu istog.  
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

### Right Side and Front View

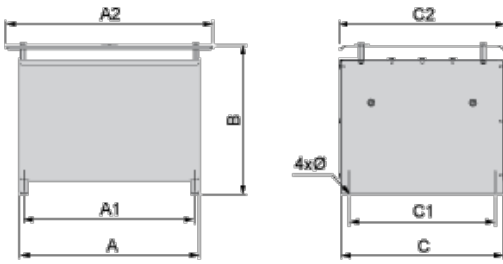

Dimensions in mm


A	B	C	A1	C1	A2	C2	Ø
740	1035	485	720	380	860	540	9 x 12

Dimensions in in.

A	B	C	A1	C1	A2	C2	Ø
29.13	40.75	19.09	28.35	14.96	33.86	21.26	0.35 x 0.47


### Clearances

mm  
in.

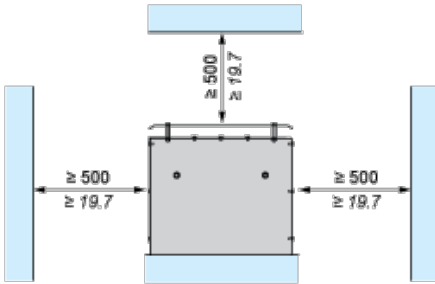

### Recommended Schema

#### 1 Braking Resistor



A1 : Drive or external braking unit

A2 : Braking resistor


PA, Bus DC

PB :

T1, Temperature control switch

T2 :

#### 2 Braking Resistors

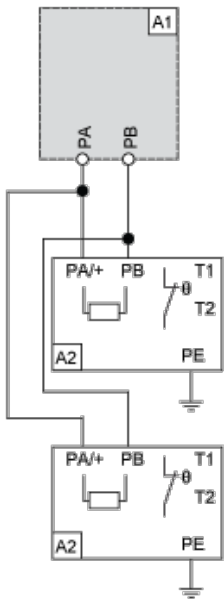

A1 : Drive or external braking unit

A2 : Braking resistor

PA, Bus DC

PB :

T1, Temperature control switch

T2 :