

XVBL0M8

svjetlo za toranj Ø 70 mm – neprekidno – žuto – IP65
– 230 V



Glavno

| | |
|------------------------------------|--|
| Range of product | Harmony XVB Universal |
| Product or component type | Complete beacon |
| Beacon or indicator bank unit type | Base unit with direct or tube fixing mode Illuminated unit |
| Signalling type | Steady |
| Mounting diameter | 70 mm |
| Component name | XVBL |
| Material | Glass reinforced polyamide (base unit) Polycarbonate (illuminated unit) |
| Light source | Yellow integral LED |
| Bulb type | Protected LED |
| [Us] rated supply voltage | 230 V AC |

Komplementarno

| | |
|--|---|
| Connections - terminals | Screw clamp terminals, connection capacity: $\leq 1 \times 1.5 \text{ mm}^2$ with cable end |
| [Ui] rated insulation voltage | 250 V conforming to IEC 60947-1 |
| Nominal voltage limit | 0.85...1.1 U_n conforming to IEC 60947-5-1 |
| Current consumption | < 17 mA AC |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1 |
| CAD overall width | 70 mm |
| CAD overall height | 139 mm |
| CAD overall depth | 70 mm |
| Terminals description ISO n°1 | (COM-1)PW (GND)GROUND |
| Product weight | 0.27 kg |

Okolina

| | |
|-------------------------------------|--|
| pollution degree | 2 |
| product certifications | CCC CSA C22-2 No 14 GOST UL 508 |
| standards | EN/IEC 60947-5-1 |
| protective treatment | TC |
| ambient air temperature for storage | -40...70 °C |
| electrical shock protection class | Class I (on support tube) conforming to IEC 61140 Class II (on base unit) conforming to IEC 61140 |
| IP degree of protection | IP65 (on fixing base XVBZ0.) conforming to IEC 60529 IP66 (on base unit) conforming to IEC 60529 |
| NEMA degree of protection | NEMA 4X (indoor) conforming to UL 508 |


Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Illuminated Beacon for BA 15d Bulb or LED

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Dimensions

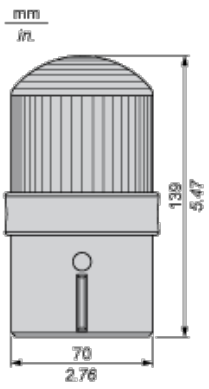

Illuminated Beacon

Wiring Diagram

