

XVC6M45S

60 mm treptajuća zujalica stupa ROGB tornja 100-240 V AC



Glavno

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	Blue LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

Komplementarno

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)
Product mounting	On support tube, 22 mm
Cable cross section	0.33 mm ² 0.83 mm ²
AWG gauge	AWG 18 AWG 22
Cable length	450 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	100 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Product weight	1.17 kg
Height	719.8 mm

Okolina

standards	EN/IEC 60947-1 EN/IEC 60947-5-1
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-35...70 °C
ambient air temperature for operation	-10...50 °C
electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration of conformity	Compliant - since 0808 - Schneider Electric declaration of conformity

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations


Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

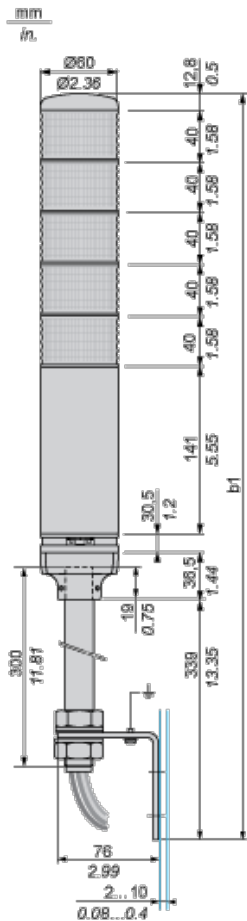

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

