

## XVC6M55SK

60 mm treptajuća zujalica nosača baze ROGBC  
tornja 100-240 V AC



### Glavno

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	Blue LED steady or flashing Clear LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

### Komplementarno

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)
Product mounting	On base
Cable cross section	0.33 mm <sup>2</sup> 0.83 mm <sup>2</sup>
AWG gauge	AWG 18 AWG 22
Cable length	750 mm 850 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	115 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Product weight	0.71 kg
Height	392 mm

### Okolina

standards	EN/IEC 60947-1 EN/IEC 60947-5-1
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-35...70 °C
ambient air temperature for operation	-10...50 °C
electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529

### Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration	Compliant - since 0808 - Schneider Electric declaration of conformity

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.  
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.  
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.  
 Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

of conformity

Reference not containing SVHC above the threshold      Reference not containing SVHC above the threshold

Available      Available

Need no specific recycling operations      Need no specific recycling operations


### Contractual warranty

Warranty period      18 months

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

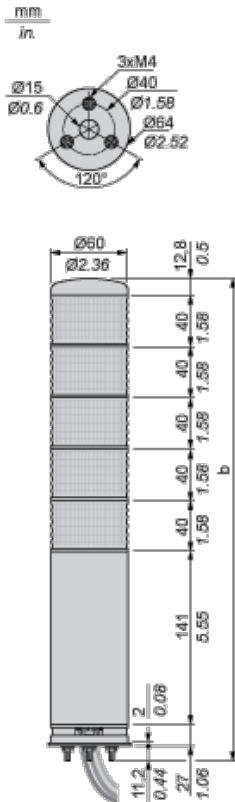

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

## Pre-assembled and Pre-wired Tower Light

### Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

