

## Podatkovni list proizvoda

### Karakteristike

## XVMC35

svjetlosna jedinica-Ø45-žuta-BA 15d-žarulja nije uključena-<= 230 V AC DC



### Glavno

Range of product	Harmony XVM
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Component name	XVM
Light source	Orange bulb not included
Bulb type	Flash discharge tube Incandescent with BA 15d base Super bright LED
[Us] rated supply voltage	<= 230 V AC/DC

### Komplementarno

Mounting diameter	45 mm
Assembly style	Customer assembly
Power dissipation in W	<= 5 W
Connections - terminals	Screw terminals: 1 x 0.325...1 x 1.5 mm <sup>2</sup>
Marking	CE
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Luminance	650 cd/m <sup>2</sup>
CAD overall width	47 mm
CAD overall height	65 mm
CAD overall depth	47 mm
Product weight	0.04 kg

### Okolina

product certifications	CCC
standards	EN/IEC 60947-1 EN/IEC 60947-5-1
ambient air temperature for storage	-25...70 °C
ambient air temperature for operation	-10...50 °C
IP degree of protection	IP40 in any position except vertical position conforming to IEC 60529 IP42 in vertical position conforming to IEC 60529
electrical shock protection class	Class I aluminium tube mounting conforming to IEC 60947-1 Class I aluminium tube mounting conforming to IEC 60947-5-1 Class I aluminium tube mounting conforming to IEC 61140 Class II base mounting conforming to IEC 60947-1 Class II base mounting conforming to IEC 60947-5-1 Class II base mounting conforming to IEC 61140
protective treatment	TC

### Contractual warranty


Warranty period	18 months
-----------------	-----------

## Customer Assembled Tower Light

### Dimensions

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get **b** dimension.

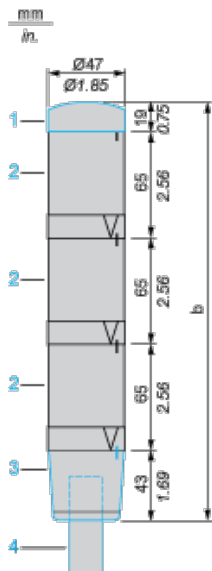

- (1) Cover (included with base unit XVMC21/C29•)
- (2) Illuminated unit
- (3) Base unit XVMC21 (without buzzer) or XVMC29• (with buzzer), to be ordered separately
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24