

## XZCC8FDM40S

ženski, M8, 4-pinski, ravni konektor – kabelska  
uvodnica M9,5 x 1



### Glavno

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight female connector M8, 4 pins
Collar material	Metal
Status LED	Without
Cable connection	Solder terminal / wire size $\leq 0.25 \text{ mm}^2$ / clamping capacity $\leq 5 \text{ mm}$

### Komplementarno

Cable gland type	M9.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	4 A
Enclosure material	Plastic
Insulating resistance	$> 1 \text{ G}\Omega$
Contact resistance	$\leq 5000 \mu\text{Ohm}$
Product weight	0.01 kg

### Okolina

IP degree of protection	IP67
ambient air temperature for operation	$-40 \dots 85 \text{ }^\circ\text{C}$


### Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0545 - Schneider Electric declaration of conformity	Compliant - since 0545 - Schneider Electric declaration of conformity

### Contractual warranty

Warranty period	18 months
-----------------	-----------

### Dimensions

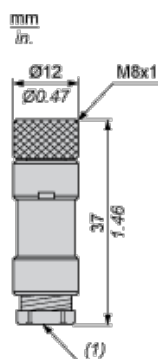

(1) Cable gland : M9.5 x 1

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Connections and Schemes

