

Podatkovni list proizvoda

Karakteristike

XZCPA1141L5

unaprijed ožičeni konektori XZ – ravni ženski – M12 – 4 pina – kabel PVC 5 m



Glavno

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Komplementarno

Electrical connection	M12, 4 pins straight female connector
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	5 m
Cable outer diameter	5.3 mm
Cable composition	4 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.19 kg

Okolina

IP degree of protection	IP69K
ambient air temperature for operation	-25...85 °C (static)
ambient air temperature for storage	-35...100 °C

Offer Sustainability


Not Green Premium product	Not Green Premium product
Compliant - since 0601 - Schneider Electric declaration of conformity	Compliant - since 0601 - Schneider Electric declaration of conformity

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions


Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

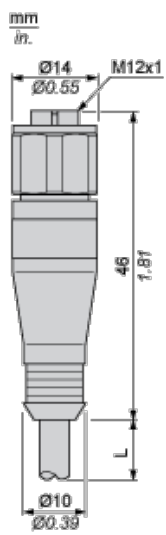

L : Length of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH : White