


170DNT11000

Modicon Momentum - komunikacijski adapter
 Profibus DP - upravljač sabirnicom PLC

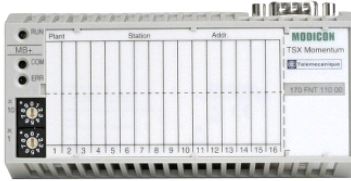

Glavno

Range of product	Modicon Momentum automation platform
Product or component type	Profibus DP communication adaptor
Communication port protocol	Profibus DP
Method of access	Master/slave
Transmission rate	9.6...12 Mbit/s
Transmission support medium	Twisted pair

Komplementarno

Topology	Multidrop Ring
Number of devices per segment	0...126
Cable distance between devices	1200 m
Addressing	Switch selectable
Fail state	Fail safe
Control parameter	CRC-16
Supply	From I/O base
Marking	CE
Local signalling	1 LED green bus fault (BF)
Electrical connection	1 connector SUB-D 9
Module format	Standard
Product weight	0.07 kg

Okolina

product certifications	CSA UL
IP degree of protection	IP20
protective treatment	TC
resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
resistance to electromagnetic fields	10 V/m 80...1000 MHz IEC 801-3
ambient air temperature for operation	0...60 °C
ambient air temperature for storage	-40...85 °C
relative humidity	95 % without condensation
operating altitude	<= 5000 m

Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 1039 - Schneider Electric declaration of conformity	Compliant - since 1039 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poipunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.