


170FNT11001C

Modicon Momentum - Konformna obloga – Fipio komunikacijski adapter

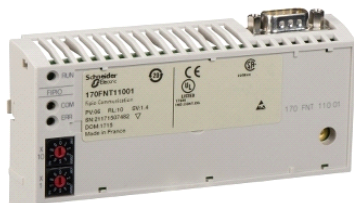

Glavno

Range of product	Modicon Momentum automation platform
Product or component type	Fipio communication adaptor
Bus manager PLC	Premium
Structure type	Open industrial support conforming to Fip standard
Communication port protocol	Fipio
Method of access	Producer/consumer principle
Transmission rate	1 Mbit/s
Transmission support medium	Optical fibre 50/125 Optical fibre 62.5/125 Twisted shielded pairs cable

Komplementarno

Topology	Extension or tap off cable
Number of devices per segment	0...31 per segment without repeater 0...97 all segment with repeater
Cable distance between devices	5000 m
Fail state	Fallback to zero Forcing to state zero Full scale value Maintain value
Supply	From I/O base
Marking	CE
Local signalling	1 LED green module powered up or in service (RUN) 1 LED red fault state (ERR) 1 LED yellow receive or send data (COM)
Product weight	0.11 kg

Okolina

product certifications	CE CSA UL
protective treatment	Conformal coating Humiseal 1A33 TC
resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
resistance to electromagnetic fields	10 V/m 80...1000 MHz IEC 801-3
ambient air temperature for operation	0...60 °C
ambient air temperature for storage	-40...85 °C
relative humidity	95 % without condensation
operating altitude	<= 5000 m

Offer Sustainability

Not Green Premium product	Not Green Premium product
Will be Compliant on 4Q2013	Will be Compliant on 4Q2013 Will be Compliant on 4Q2013

Contractual warranty

Warranty period	18 months
-----------------	-----------

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.