


## A9E18037

Acti9 iPB 1NC jedn.potisni gumb, sivi-žaruljica za indik,crvena, 110 – 230 V AC

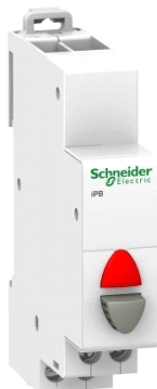

### Glavno

Range	Acti 9
Product name	Acti 9 iPB
Product or component type	Push-button
Device short name	IPB
Standards	IEC 60669-1 IEC 60947-5-1

### Komplementarno

Contacts type and composition	1 NC
[Ie] rated operational current	20 A
[Ue] rated operational voltage	250 V AC
Control type	1 push-button grey
Local signalling	LED indicator: red, long service life 100000 h of constant lighting efficiency (consumption 0.3 W)
Signalling circuit voltage	AC: 110...230 V 50/60 Hz
Mounting mode	Fixed
Mounting support	35 mm symmetrical DIN rail
Comb busbar and distribution block compatibility	Upside: Libro Upside: ProDis Upside: Clario
9 mm pitches	2
Height	82 mm
Width	18 mm
Depth	71.5 mm
Colour	White
Electrical durability	AC-22: 30000 cycles AC 50/60 Hz
Connections - terminals	Staggered tunnel terminal 1 cable(s) 0.5 mm <sup>2</sup> rigid Staggered tunnel terminal 1 cable(s) 0.5 mm <sup>2</sup> flexible Staggered tunnel terminal 1 cable(s) 0.5 mm <sup>2</sup> flexible with ferrule Staggered tunnel terminal 2 cable(s) 2.5 mm <sup>2</sup> rigid Staggered tunnel terminal 2 cable(s) 2.5 mm <sup>2</sup> flexible Staggered tunnel terminal 2 cable(s) 2.5 mm <sup>2</sup> flexible with ferrule
Wire stripping length	9 mm
Tightening torque	1 N.m

### Okolina

tropicalisation	2
relative humidity	95 % ( 55 °C )
ambient air temperature for operation	-35...70 °C
ambient air temperature for storage	-40...80 °C

### Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1001 - Schneider Electric declaration	Compliant - since 1001 - Schneider Electric declaration of conformity

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

of conformity

Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

**Contractual warranty**

Warranty period	18 months
-----------------	-----------