


## A9V16263

Vigi iC60 – dodatni blok za propuštanje uzemljenja –  
2P – 63 A – 500 mA – Tip AC

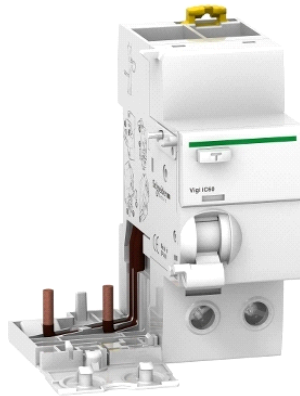

### Glavno

Range	Acti 9
Product or component type	Add-on residual current devices
Device short name	Vigi iC60
Poles description	2P
[In] rated current	63 A
Earth-leakage sensitivity	500 mA
Earth-leakage protection time delay	Instantaneous
Earth-leakage protection class	Type AC
Network type	AC
Network frequency	50/60 Hz
[Ue] rated operational voltage	230/400 V AC 50/60 Hz conforming to EN 61009-1 230/415 V AC 50/60 Hz conforming to IEC 61009-1
Standards	EN 61009-1 IEC 61009-1
9 mm pitches	4

### Komplementarno

Device location in system	Outgoer
Residual current tripping technology	Voltage independent
[Ui] rated insulation voltage	500 V AC 50/60 Hz conforming to IEC 60947-2
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Range compatibility	Acti 9 iC60 Acti 9 Reflex iC60
Product compatibility	Single terminal
Local signalling	Trip indicator
Mounting mode	Clip-on
Mounting support	DIN rail
Electrical connection to mcb	By screws
Comb busbar and distribution block compatibility	Bottom: YES
Height	91 mm
Width	72 mm
Depth	73.5 mm
Product weight	0.165 kg
Connections - terminals	Tunnel type terminal downside 1 cable(s) 1...35 mm <sup>2</sup> rigid without cable end Tunnel type terminal downside 1 cable(s) 1...25 mm <sup>2</sup> flexible without cable end Tunnel type terminal downside 1 cable(s) 1...25 mm <sup>2</sup> flexible with cable end
Wire stripping length	14 mm (bottom)
Tightening torque	3.5 N.m (bottom)

### Okolina

IP degree of protection	IP20 conforming to IEC 60529 IP40 modular enclosure conforming to IEC 60529
pollution degree	3 conforming to IEC 60947-2
electromagnetic compatibility	8/20 µs impulse withstand 250 A conforming to IEC 61009-1
ambient air temperature for operation	-5...60 °C

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

ambient air temperature for storage

-40...85 °C

---

### Offer Sustainability

---

Green Premium product

Green Premium product

---

Compliant - since 0627 - Schneider Electric declaration of conformity

Compliant - since 0627 - Schneider Electric declaration of conformity

---

Reference not containing SVHC above the threshold

Reference not containing SVHC above the threshold

---

Available

Available

---

Need no specific recycling operations

Need no specific recycling operations

---

### Contractual warranty

---

Warranty period

18 months