


CCT1A031

Bežični Odace/Unica-relej univerzalnog prijemnika-
230 V AC-zašt. osigurača,sivi

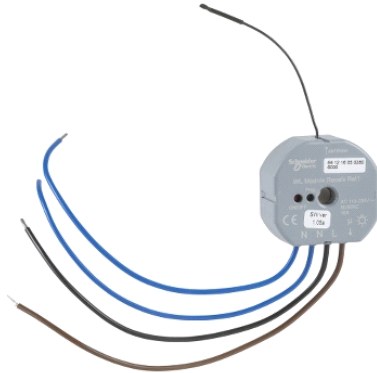

Glavno

Range compatibility	Alvais RF Free RF IHC Unica Wireless Odace Wireless
Product or component type	Universal receiver relay
Transmission frequency	868.3 MHz
[Ue] rated operational voltage	127/230 V AC (+/- 10 %), 50/60 Hz
Colour tint	Grey

Komplementarno

Wiring device mounting	Flush
Operating distance	Indoor: 10...50 m Outdoor: <= 100 m
Load type	Low voltage halogen lamp with electronic transformer: 5...500 VA Low voltage halogen lamp with ferromagnetic transformer: 5...500 VA Low voltage halogen lamp with toroidal transformer: 5...500 VA Motor: 5...690 VA Fan: 5...690 VA Compact fluorescent lamp: 5...880 VA LED lamp: 5...880 VA Fluorescent tube: 5...920 VA 230 V AC incandescent lamp: 5...2300 W 230 V AC halogen lamp: 5...2000 W
Load interrupting current	Light: 10 A Motor: 3 A
Protection type	Fuse protection
Standards	89/336/EEC 99/5/EEC EN 60669-1 EN 60669-2-1 EN 61000-6-2 EN 61000-6-3 ETSI EN 300 220 ETSI EN 301 489
Ambient air temperature for operation	-5...50 °C
Relative humidity	20...95 %
Height	46 mm
Width	46 mm
Depth	23 mm
Cable length	0.2 m

Okolina

IP degree of protection	IP20
-------------------------	------

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1002 - Schneider Electric declaration of conformity	Compliant - since 1002 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Available

Available

Contractual warranty

Warranty period

18 months
