


GV1L3

TeSys GV2 – ograničavači – na prekidaču

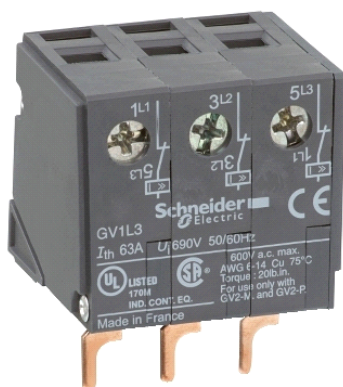

Glavno

Range	TeSys
Product or component type	Limiters
Accessory / separate part category	Protection accessory

Komplementarno

Range compatibility	TeSys TeSys GV2 GV2ME TeSys TeSys GV2 GV2P
Mounting support	On circuit breaker
[Ith] conventional free air thermal current	63 A
Activation threshold	1500 A
Short-circuit current	100000 A
[Ui] rated insulation voltage	690 V conforming to IEC 60947-1
Connections - terminals	Screw clamp terminals 1 cable(s) 1.5...16 mm ² - cable stiffness : flexible - with cable end Screw clamp terminals 1 cable(s) 1.5...25 mm ² - cable stiffness : flexible - without cable end Screw clamp terminals 1 cable(s) 1.5...25 mm ² - cable stiffness : solid Screw clamp terminals 2 cable(s) 1.5...10 mm ² - cable stiffness : solid Screw clamp terminals 2 cable(s) 2.5...10 mm ² - cable stiffness : flexible - without cable end Screw clamp terminals 2 cable(s) 1.5...4 mm ² - cable stiffness : flexible - with cable end
Tightening torque	2.2 N.m
Product weight	0.13 kg


Okolina

Contractual warranty

Warranty period	18 months
-----------------	-----------

Current Limiter

GV1L3



Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.