

## LC1D65AF7

sklopnik TeSys D-3P (3 NO)-AC-3- $\leq$  440 V 65 A-  
zavojnica 110 V AC 50/60 Hz



### Glavno

Range	TeSys
Product name	TeSys D
Product or component type	Contactora
Device short name	LC1D
Contactora application	Motor control Resistive load
Utilisation category	AC-1 AC-3 AC-4
Poles description	3P
Pole contact composition	3 NO
[Ue] rated operational voltage	$\leq$ 690 V AC 25...400 Hz for power circuit $\leq$ 300 V DC for power circuit
[Ie] rated operational current	80 A ( $\leq$ 60 °C) at $\leq$ 440 V AC AC-1 for power circuit 65 A ( $\leq$ 60 °C) at $\leq$ 440 V AC AC-3 for power circuit
Motor power kW	11 kW at 400 V AC 50/60 Hz AC-4 30 kW at 380...400 V AC 50/60 Hz AC-3 37 kW at 500 V AC 50/60 Hz AC-3 37 kW at 660...690 V AC 50/60 Hz AC-3 18.5 kW at 220...230 V AC 50/60 Hz AC-3
Motor power hp	40 hp at 460/480 V AC 50/60 Hz for 3 phases motors 5 hp at 115 V AC 50/60 Hz for 1 phase motors 10 hp at 230/240 V AC 50/60 Hz for 1 phase motors 20 hp at 200/208 V AC 50/60 Hz for 3 phases motors 20 hp at 230/240 V AC 50/60 Hz for 3 phases motors 50 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	110 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	Conforming to IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	80 A at $\leq$ 60 °C for power circuit 10 A at $\leq$ 60 °C for signalling circuit
Irms rated making capacity	1000 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	1000 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit 520 A $\leq$ 40 °C 10 s power circuit 900 A $\leq$ 40 °C 1 s power circuit 110 A $\leq$ 40 °C 10 min power circuit 260 A $\leq$ 40 °C 1 min power circuit

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric, Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Associated fuse rating	125 A gG at ≤ 690 V coordination type 1 for power circuit 125 A gG at ≤ 690 V coordination type 2 for power circuit 10 A gG for signalling circuit conforming to IEC 60947-5-1
Average impedance	1.5 mOhm at 50 Hz - Ith 80 A for power circuit
[Ui] rated insulation voltage	600 V for power circuit certifications CSA 600 V for power circuit certifications UL 690 V for power circuit conforming to IEC 60947-4-1 690 V for signalling circuit conforming to IEC 60947-1 600 V for signalling circuit certifications CSA 600 V for signalling circuit certifications UL
Electrical durability	1.45 Mcycles 65 A AC-3 at Ue ≤ 440 V 1.4 Mcycles 80 A AC-1 at Ue ≤ 440 V
Power dissipation per pole	6.3 W AC-3 9.6 W AC-1
Protective cover	With
Mounting support	Plate Rail
Standards	UL 508 CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1
Product certifications	CCC CSA GOST UL
Connections - terminals	Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: flexible - with cable end Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: flexible - without cable end Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: flexible - without cable end Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: flexible - with cable end
Tightening torque	Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal 4 mm Power circuit: 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm <sup>2</sup> hexagonal 4 mm
Operating time	12...26 ms closing 4...19 ms opening
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 2000000 cycles contactor with

Mechanical durability	6 Mcycles
Operating rate	3600 cyc/h at $\leq 60\text{ }^{\circ}\text{C}$

## Komplementarno

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 U <sub>c</sub> drop-out at 60 °C, AC 50/60 Hz 0.8...1.1 U <sub>c</sub> operational at 60 °C, AC 50 Hz 0.85...1.1 U <sub>c</sub> operational at 60 °C, AC 60 Hz
Inrush power in VA	140 VA at 20 °C (cos $\phi$ 0.75) 60 Hz 160 VA at 20 °C (cos $\phi$ 0.75) 50 Hz
Hold-in power consumption in VA	13 VA at 20 °C (cos $\phi$ 0.3) 60 Hz 15 VA at 20 °C (cos $\phi$ 0.3) 50 Hz
Heat dissipation	4...5 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm for signalling circuit

## Okolina

IP degree of protection	IP20 front face conforming to IEC 60529
protective treatment	TH conforming to IEC 60068-2-30
pollution degree	3
ambient air temperature for operation	-5...60 °C
ambient air temperature for storage	-60...80 °C
permissible ambient air temperature around the device	-40...70 °C at U <sub>c</sub>
operating altitude	3000 m without derating in temperature
fire resistance	850 °C conforming to IEC 60695-2-1
flame retardance	V1 conforming to UL 94
mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor open 10 Gn for 11 ms Shocks contactor closed 15 Gn for 11 ms
height	122 mm
width	55 mm
depth	120 mm
product weight	0.86 kg


## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0001 - Schneider Electric declaration of conformity	Compliant - since 0001 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Dimensions

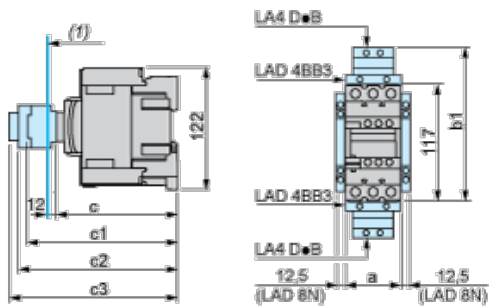

(1) Minimum electrical clearance

LC1		D40A...D65A
a		55
b1	with LA4 D•2	–
	with LA4 DB3 or LAD 4BB3	136
	with LA4 DF, DT	157
	with LA4 DM, DW, DL	166
c	without cover or add-on blocks	118
	with cover, without add-on blocks	120
c1	with LAD N (1 contact)	–
	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK10, LAD 6DK	163
c3	with LAD T, R, S	171
	with LAD T, R, S and sealing cover	175

## Wiring

