


## MGU3.573.25

Unica Wireless–kombinirani regulator svjetla bez  
nultoečke–230 V AC–2 m–slonovača

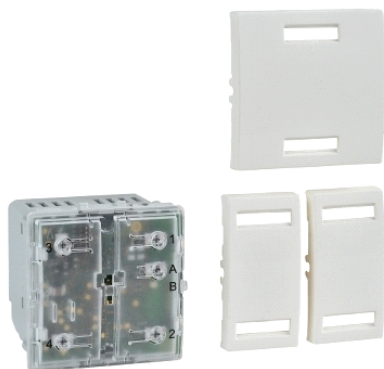

### Glavno

Range of product	Unica Wireless
Product or component type	Combined dimmer
Device presentation	Mechanism
Transmission frequency	868.3 MHz
[Ue] rated operational voltage	230 V AC (+/- 10 %), 50 Hz
Number of modules	2 modules
Fixing mode	Clip-in
Colour tint	Ivory
Device composition	1 large rocker and 2 narrow rockers Wireless emitter and receiver
Provided equipment	Set of 8 symbols

### Komplementarno

Wiring device mounting	Flush
Type of setting	Without neutral position
Operating distance	Indoor: 10...50 m Outdoor: <= 300 m
Load type	230 V AC halogen lamp - 20...315 W 230 V AC incandescent lamp - 20...315 W Low voltage halogen lamp with electronic transformer - 20...315 VA Low voltage halogen lamp with ferromagnetic transformer - 20...315 VA Low voltage halogen lamp with toroidal transformer - 20...270 VA
Protection type	Damage protection from inappropriate load Overload protection Short-circuit protection Temperature rise protection
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm <sup>2</sup> for flexible cable(s) <= 2 x 2.5 mm <sup>2</sup> for rigid cable(s)
Standards	73/23/EEC 89/336/EEC 99/5/EEC EN 60669-1 EN 60669-2-1 EN 61000-6-2 EN 61000-6-3 ETSI EN 300 220 ETSI EN 301 489
Ambient air temperature for operation	-5...35 °C
Relative humidity	20...95 %
Embedding depth	34 mm
Depth	46 mm

### Okolina

IP degree of protection	IP20
environmental characteristic	Acetone Alcohol Ammonia Bleach Liquid soap Oil Petrol UV resistant Window-cleaning fluid

Informacije dane u ovoj dokumentaciji sadrže opće opisne i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda. Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene. Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poplunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog. Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

---

environmental health and issues

Halogen free

---

### Offer Sustainability

---

Not Green Premium product

Not Green Premium product

---

Compliant - since 1426 - Schneider Electric declaration of conformity

Compliant - since 1426 - Schneider Electric declaration of conformity

---

Reference contains SVHC above the threshold - go to CaP for more details

Reference contains SVHC above the threshold

---

### Contractual warranty

---

Warranty period

18 months

---