


PRA06218

Sučelje Pragma – za površinsko kućište – 2 x 13 ili 18 modula – bez vrata

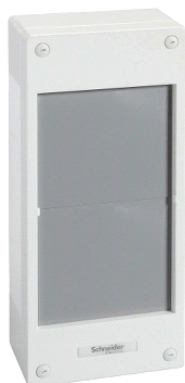

Glavno

Range	Pragma
Product or component type	Enclosure
Enclosure type	Interface
Width	200 mm
Height	450 mm
Depth	115 mm
Number of 18 mm modules per row	13 18
Number of horizontal rows	2
Electrical insulation class	Class II Double insulation
Provided equipment	Identification label (1) Plain plate per row (1) Front face and back connection (1)

Komplementarno

Enclosure mounting	Surface
9 mm pitches	26 36
Total number of 18 mm modules	14
Number of plates	3for plain plate
[In] rated current	63 A 90 A
Type of rail	Without
Cable entry	Cable or tube Cut-out plates Removable plates Trunking
Enclosure material	Back part: technoplastic Front face: technoplastic
Colour	Enclosure: white (RAL 9016) Front face: grey (RAL 7004)
Market segment	Residential Small commercial

Okolina

fire resistance	Back part: 750 °C conforming to IEC 60695-2-1 Front face: 750 °C conforming to IEC 60695-2-1
IP degree of protection	IP30 without door conforming to EN/IEC 60529 IP40 with door conforming to EN/IEC 60529
IK degree of protection	IK08 without door conforming to EN/IEC 62262 IK09 with door conforming to EN/IEC 62262
overvoltage category	II
ambient air temperature for operation	-25...60 °C
standards	EN 60439-3 EN 60695-2-11 IEC 60439-3 IEC 60529 IEC 60695-2-11 IEC 60947-7-1 IEC 62262

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i potpunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Contractual warranty

Warranty period	18 months
-----------------	-----------
